


ZMORPH FAB

3D Printer

DISCOVER ZMORPH FAB

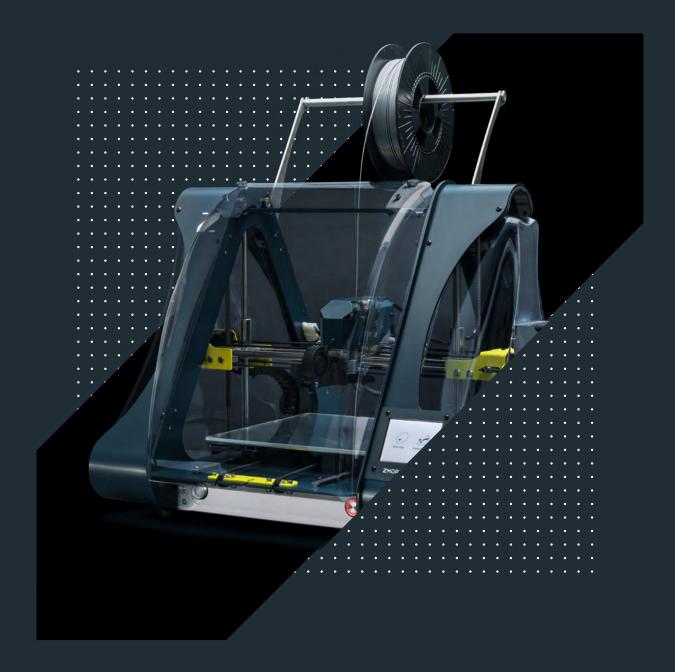

Two Tools in One Device for Learning and Prototyping







Turn your desk into a workshop with Zmorph Fab Two-in-One 3D Printer.

The interchangeable toolheads system and a wide variety of compatible materials make it the most versatile desktop 3D printer on the market.

Read further to learn about all its features and functions.

| Hassle-Free 3D Printing





3D PRINTING

- The new Single Extruder Toolhead features filament sensor for easier maintenance, and improved airflow for faster overhangs

 3D printing.
- O2 Autocalibration makes 3D printing easy and fast, even for beginners.
- O3 Super-flat borosilicate 3D printing bed heats up to 115°C, which improves the first layer adhesion in more advanced materials such as ABS or TPE.
- O4 Zmorph Fab works with almost every plastic filament available on the market. Multi-material capabilities let you 3D print with water-soluble supports.

Precise CNC Milling for Professionals





CNC MILLING

- Heavy-duty aluminum plates provide amazing rigidity and keep electronics safe from dust and leftovers from CNC machining.
- OZ The sturdy construction is designed to deliver both 3D printing and withstand CNC operations.
- OB Reinforced Cartesian XZ-head motion system doubled up with dual glass-fiber-reinforced belts.
- O4 Support for a wide variety of engineering materials wood, composites, soft plastics, even soft metals.
- The all-new CNC worktable offers a convenient materials mounting system, great stability, and is open for custom user designs.

Lots of Reasons in One Device



CNC Environment

Zmorph Fab is equipped with a professional CNC worktable with a simple solution for materials mounting. The software features CAM-standard workflow for CNC procedures with STEP operations, ability to change the tool within one G-code, and path visualisation.



Seamless UI

Accessible and intuitive user interface is designed for both professionals and first-timers. Effortlessly maneuver through the menu.



Voxelizer

The all-in-one software for 3D printing, CNC milling, and cutting. Voxelizer has an optimized workflow for Zmorph 3D printers ensuring the best and fastest results.



SMART Toolheads

Changing workflows in Zmorph Fab is fast and easy with the automatic toolhead detection. Switching tools takes just a few easy steps and no more than a minute.



Quiet Work

Behind the quiet work stands the design of the 3D printer enhanced by high-quality electronics and carefully programmed drivers.



Air Filtration

Removable Carbon/HEPA filters disintegrate semi-toxic fumes and particles released by melted filaments during 3D printing and during laser engraving. Zmorph Fab will let you know when the filters need to be changed.

Voxelizer Software

Get the most out of Zmorph Fab with the dedicated slicing software.

Voxelizer covers all workflows available in Zmorph 3D Printers in one software.



Use materials presets for Zmorph Fab or make your own.

Work with upgraded CAMstandard CNC workflow with STEP operations, ability to change the tool within one G-code, and path visualisation.

Control your designs with local settings and advanced support structures.

6

GET VOXELIZER

zmorpn3a.com

Materials

Zmorph Fab opens unlimited possibilities unavailable for single-purpose 3D printers. Choose from over 50 materials like plastic filaments for 3D printing, and soft metals for CNC milling. Zmorph Fab can do it all.




Designed for Reliability



HASSLE-FREE
3D PRINTING



STELLAR BUILD
QUALITY

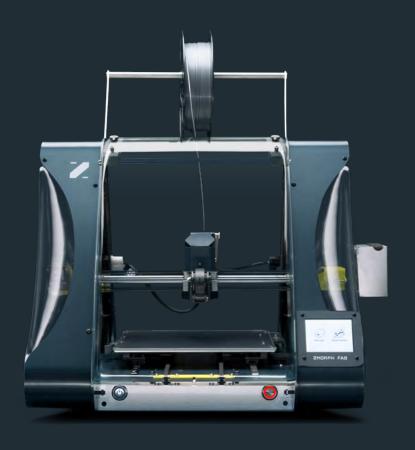



ALL-IN-ONE SOFTWARE



INDUSTRY-STANDARD ELECTRONICS

Products Trusted by Educators, Designers and Engineers



The Two-in-One tool for workshops, schools and FabLabs

3D Printing Industry



A beast of a machine in more ways than one



A prototyping Holy Grail

Breaks'n'Makes



Available All Over the World



RESELLERS

Zmorph Fab is available worldwide through a network of authorized companies that distribute Zmorph machines, branded materials, accessories and spare parts.

Visit our website to find the nearest Zmorph reseller.

FIND RESELLERS

 \rightarrow

| Technical Specifications

3D PRINTING

3D printing technology	FFF (Fused Filament Fabrication)
Toolheads	Single Extruder Toolhead 1.75, Dual Extruder Toolhead
Layer resolution	0.05 - 0.4 [mm] *
Maximum printing temperature	250 [°C]
Work area	235 x 250 x 165 [mm]
Maximum bed temperature	115 [°C]
Minimum wall thickness	0.4 [mm] *
Dimensional accuracy	+/- 0.2 [mm]
Work area leveling method	Automatic, Manual
Material container	Spool, reel
Material diameter	1.75, 3.00 [mm]
Nozzle diameter	0.3, 0.4, 0.6 [mm]
Support structures	Mechanically and chemically removed - printed with the same material as the model
Connectivity	USB, Ethernet, SD card
Available Materials	PLA, ABS, PET, Nylon, PVA, HIPS, ASA, TPE, PP, PC, PMMA, PC/ABS
Third party materials	Applicable
Work speed	40 [mm/s]
Travel speed	120 [mm/s]

CNC MILLING

Toolhead	CNC spindle
Spindle max power	300 [W]
Noise	70 [dB]
Work area leveling method	Manual
Work area	235 x 250 x 85 [mm] **
Work speed	0.1 ~ 20 [mm/s]
Travel speed	120 [mm/s]
Available Materials	ABS, Nylon, HDPE, PTFE, PC, PP, POM, PMMA, PVC, HIPS, LDPE, PET, Carbon, CCL FR4, Dibond, TCF, Wood, Wood-like, Aluminum, Brass, Copper, Cardboard, Wax, Modeling board, Styrodur
Tool holding	ER-11 collet

Technical Specifications

WEIGHT AND PHYSICAL DIMENSIONS

Printer without a spool holder	520 x 500 x 450 [mm]
Printer with a spool holder	520 x 500 x 570 [mm]
Printer with a HEPA filter	570 x 500 x 570 [mm]
Dimensions of the transport box	600 x 600 x 570 [mm]
Full set weight	28.70 [kg]
Printer weight	14.45 [kg]
Single Extruder Toolhead 1.75 weight	0.70 [kg]
Dual Extruder Toolhead	1.00 [kg]
CNC Milling Toolhead	0.90 [kg]
Thick Paste Extruder Toolhead	0.60 [kg]

ELECTRICAL PARAMETERS

AC Input	100 [VAC] ~ 4 [A] 50/60 [Hz] 240 [VAC] ~ 2 [A] 50/60 [Hz]
Maximum Power Consumption	350 [W]
Power Consumption with single-head extruder	220 [W]
Power Consumption with Dual-head extruder	230 [W]
Power Consumption with CNC toolhead	330 [W]

SOFTWARE

Software Bundle	Voxelize
Supported File Types	.stl, .obj, .step, .dxf, .png, .bmp
Supported Operating Systems	Windows 7/10 (64 bit) or highe macOS 10.13 or highe

FILTRATION PARAMETERS

Filter type	HEPA/Carbon
Ventilation power	1.54 [W]
Filter dimensions	80 x 80 x 25 [mm]
Filter system dimensions	85 x 85 x 50 [mm]
Filtration control	Temperature

TEMPERATURE PARAMETERS

Ambient Operation Temperature	15 ~ 30 [°C]
Storage Temperature	-10 ~ 40 [°C]

Contact



[T] +48 71 33 68 923

[M] sales@zmorph3d.com

www.zmorph3d.com

