



## Expand Productivity with Network-ready Connections

Experience the exceptional performance of InFocus LightPro Vista II Series projectors. These projectors offer high brightness, exceptional lamp life, and superb connectivity for diverse user scenarios.

Whether it is a meeting room, lobby, control room, or classroom, the Vista II lineup is your go-to display solution. It delivers clear and eye-catching imagery and integrates seamlessly with your network.



**CRESTRON  
CONNECTED**

**DLP™**  
A TEXAS INSTRUMENTS TECHNOLOGY

**HDMI™**  
HIGH-DEFINITION MULTIMEDIA INTERFACE

All six InFocus LightPro Vista II Series models meet the Crestron Connected Network Communication Protocols and are compatible with Crestron XiO Cloud® Service.

### Easy Connectivity with Dual HDMI Ports

Integrated with two HDMI ports, the Vista II Series offers ample connectivity options for your HDMI-enabled devices. You don't need to disconnect your device to connect to a new one. Just use the on-screen display to choose and switch between input sources effortlessly.

### Centralised Control for Efficient Management

The Vista II lineup is compatible with major network protocol standards, including Crestron, PLink, AMX, Extron, and an extensive set of RS232 commands, making network infrastructure integration easy, enhancing control efficiency, and simplifying device management.

### Versatile for Different Spaces

From XGA to Full HD, the Vista II Series offers a wide range of resolutions. The series also comes with both short and standard throw lens options, providing flexibility for different setups. With features like digital edge masking and image shift, Vista II Series makes it easy to get a perfect image every time.

### Bright and Vibrant Visuals Any Time

Get bright and vivid images on any surface with 4400-4700 lumens on the standard throw models and 4000-4300 lumens on short throw models. The Vista II Series offers rich colours and crisp text, making it ideal for classrooms and meeting spaces with ambient light.

# Why Choose LightPro Vista II Series



## Compact & Lightweight

At only 2.9kg/6.4lb, the Vista II Series is an excellent choice for on-the-go, desktop, or install projection.



## Beautiful Vibrant Colours

Always get beautiful images with bright, vivid, yet natural colours with DLP technology.



## Instant Power On / Off

Say goodbye to waiting with instant power up/down. It is ready to go on or off whenever you are.



## High Contrast Ratio

The high contrast ratio of 30000:1 offers exceptional image clarity and depth, enhancing the overall viewing experience.



## Low Total Cost of Ownership

Industry-leading lamp life of 15,000 hours and filter-free design saves time and money.



## Environmentally Friendly

Filter-free DLP technology reduces the electronic waste generated from filter replacements.



## 24/7 Operation

The Vista Series is designed for 24/7 operation in standard orientation and is ideal for applications requiring extended projection periods.



## USB-A Power for Devices

The built-in USB-A Power port can power your external USB devices such as Chromecast for more exciting and collaborative presentations.





## Full 3D Capability

Connect to almost any 3D source, including 3D Blu-ray players and the latest game consoles, to capture your audience with the amazing realism of 3D content.

Whether you're engaging students or delving into business concepts, your audience enjoys the realism of an unforgettable 3D experience.



## Make a Big Impact with Short Throw Models

The LightPro Vista II short throw models allow you to project large images even in small spaces, minimising shadows and obstructions.

This ensures that visuals are clear and bright to leave a lasting impression.




## LightPro Vista II Series Connectivity

### Inputs

1. HDMI™ 1.4
2. HDMI™ 1.4
4. VGA in
5. Composite Video
6. 3.5mm Audio In
9. RJ45

### Others

8. Power
10. Kensington Security Slot™
13. IR receiver
14. Control Keypad

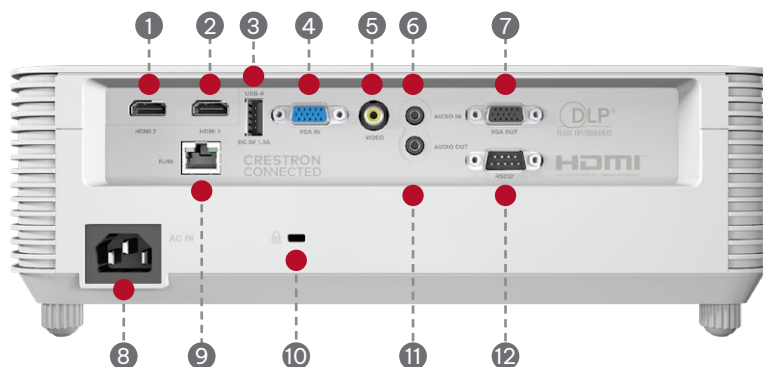

### Outputs

3. USB-A (DC 5V 1.5A)
7. VGA Out (Monitor loop through)
11. 3.5 Audio Out

### Image

15. Lens Zoom and Focus

### Control

12. RS232



InFocus LightPro Vista II Series		IN0044SL	IN0046SL	IN0048SL	IN0044ST	IN0046ST	IN0048ST
IMAGE	Projection Technology	TI DLP®	TI DLP®	TI DLP®	TI DLP®	TI DLP®	TI DLP®
	Panel Size	0.55" DMD	0.65" DMD	0.65" DMD	0.55" DMD	0.65" DMD	0.65" DMD
	Native Resolution	XGA, 1024 x 768	WXGA, 1280 x 800	1080P, 1920 x 1080	XGA, 1024 x 768	WXGA, 1280 x 800	1080P, 1920 x 1080
	Aspect Ratio	4:3	16:10	16:9	4:3	16:10	16:9
	Brightness (Lumens)	4600	4700	4400	4200	4300	4000
	Contrast Ratio	30000:1	30000:1	30000 : 1	30000:1	30000:1	30000 : 1
	Light Source	UHP Lamp	UHP Lamp	UHP Lamp	UHP Lamp	UHP Lamp	UHP Lamp
	Light Source Life Maximum (Hours)	15000	15000	15000	15000	15000	15000
	Colour Processing	10-bit	10-bit	10-bit	10-bit	10-bit	10-bit
	Maximum Supported Resolution	1920 x 1200	1920 x 1200	1920 x 1200	1920 x 1200	1920 x 1200	1920 x 1200
	Horizontal Sync. Range (KHz)	15~ 97.55	15~ 97.55	15~ 97.55	15~ 97.55	15~ 97.55	15~ 97.55
	Vertical Sync. Range (Hz)	54 ~ 85	54 ~ 85	54 ~ 85	54 ~ 85	54 ~ 85	54 ~ 85
	Uniformity (%)	80%	80%	80%	80%	80%	80%
OPTICAL	Lens	1.3X	1.3X	1.3X	1:1 Fixed	1:1 Fixed	1:1 Fixed
	Lens Zoom Adjustment	Manual	Manual	Manual	-	-	-
	Image Offset (%)	115%	112.4%	116%	115%	112.4%	116%
	Focal Length (mm)	21.85 ~ 24.01	21.85 ~ 24.01	21.85 ~ 24.01	7.15	7.15	7.15
	Keystone Adjustment	Manual/ Automatic	Manual/ Automatic	Manual/ Automatic	Manual/ Automatic	Manual/ Automatic	Manual/ Automatic
	Vertical Keystone Correction	± 40°	± 40°	± 40°	± 20°	± 20°	± 20°
	Projection Factor	1.48-1.93	1.19~1.54	1.13-1.47	0.617	0.521	0.496
	Projection Distance (Meters/Feet)	1.0 ~ 9.1 / 3.28 ~ 29.85	1.0 ~ 7.7 / 3.28 ~ 22.26	1.0 ~ 10.0 / 3.28 ~ 32.8	0.4 ~ 3.8 / 1.31 ~ 12.46	0.4 ~ 3.8 / 1.31 ~ 11.15	0.4 ~ 3.3 / 1.31 ~ 10.82
	Optical Zoom	1.3:1	1.3:1	1.3:1	1:1 Fixed	1:1 Fixed	1:1 Fixed
	Digital Zoom Demagnification / Magnification	0.8x ~ 2.0x	0.8x ~ 2.0x	0.8x ~ 2.0x	0.8x ~ 2.0x	0.8x ~ 2.0x	0.8x ~ 2.0x
	Focus Adjustment	Manual	Manual	Manual	Manual	Manual	Manual

GENERAL	<b>Product Dimensions</b> (L x W x H) (mm / in)	<b>Operating Humidity</b> (%)	<b>Max Operating Altitude</b> (meters / feet)	<b>Power Supply</b>
	313 x 236 x 96.4/ 12.4 x 9.3 x 3.8	10 ~ 85	3048 / 10000	10 ~ 240 V AC; 50 ~ 60Hz
	<b>Product Weight</b> (Kilograms / Pounds)	<b>Storage Humidity</b> (%)	<b>Operating Temperature</b> (Celsius / Fahrenheit)	<b>Power Consumption</b> Min / Max (W)
	2.9 / 6.4	10 ~ 85	5 ~ 40 / 41 ~ 104	210 ~ 267
	<b>Packaged Dimensions</b> (L x W x H) (mm / in)	<b>Fan Noise</b> (dB)	<b>Storage Temperature</b> (Celsius / Fahrenheit)	<b>Safety and Regulatory</b>
	395 x 337 x 166/ 15.6 x 13.3 x 6.5	27	-10 ~ 60 / 14 ~ 140	CB, CE, EAC, cTUVus, CCC, FCC, UKCA, NOM, PSB, BIS
	<b>Packaged Weight</b> (Kilograms / Pounds)	<b>Audio</b> (W)	<b>Security</b>	<b>Environmental</b>
	4.1 / 9.0	1 x 10	Kensington Security Slot™, PIN Code Lock & Timer	WEEE, EU RoHS, China RoHS, CEL, CECP

\* Product specifications, terms, and offerings are subject to change at any time without notice and may vary between countries. Please check with your local InFocus distributor for more information.

\*\* Actual lamp life may vary based on the environment and projector usage. Conditions that may affect lamp life include temperature, altitude, and air particulate matter etc.

Images shown herein are simulations. ©2025 Maxnerva Technology Services Limited. All rights reserved. InFocus and the InFocus logo are trademarks of Maxnerva Technology Services Limited. All trademarks or the registered trademarks are the property of their respective companies. INFOCUS\_VISTA II\_DS\_EN\_VER\_07012501