

# Maker's Supply User's Manual


CyberBrick

## 1. Features

- 2.4Ghz wireless remote control, 10m control distance with an ultra-small size.
- High cost-performance ratio, suitable for car, ship and tank models, etc.
- Provide up to 10 channels for connecting different devices.
- Transmitter Input Voltage: 4.5V~12.6V (1S-3S) , operating current: 65mA.
- Receiver Input Voltage: 7.4V-12.6V (2S-3S) , standby current: 60mA, operating current: 200~300mA, maximum current: 3A.
- Support configuration on mobile phones& PCs, with a user-friendly interface.

## 2. Receiver&Transmitter Shield

### Remote Control Transmitter Shield

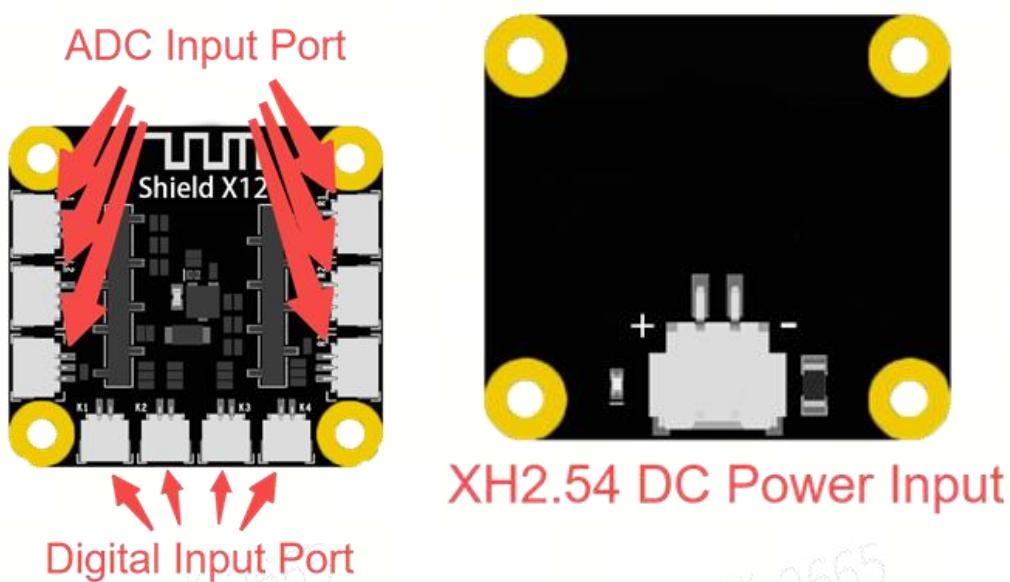


On the left and right sides of the transmitter shield, there are respectively 3 ADC input channels. Below it, there are 4 digital input channels. The gray slot on the back is the slot for the multi-function controller core. It can be powered through the XH2.54

power input.

- **ADC input port L1~L3, R1~L3:** 3pin SH1.0 slot. Connectable with single/dual axis joystick module, three-position rocker switch module, etc.
- **Digital input Port K1~K4:** 2pin SH1.0 slot. Connectable with momentary button module, etc.
- **XH2.54 DC power input:** 2pin XH2.54slot. Connectable with **4.5V~12.6V** power supply.


## Remote Control Receiver Shield

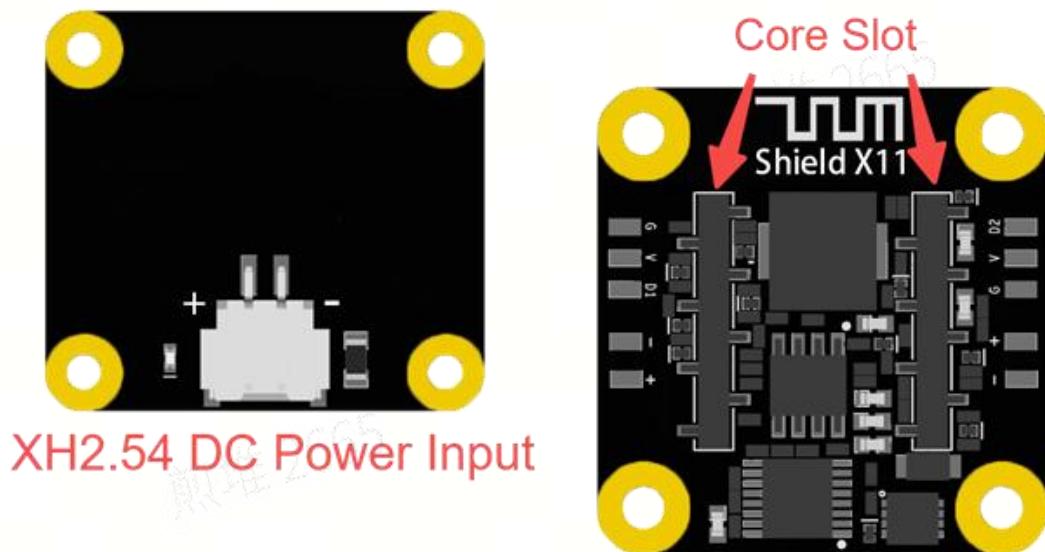

On the left and right sides of the receiver shield, there is respectively a DC motor port and a WS2812 port. In the center, there are 4 servo ports. It can be powered through the XH2.54 power input.

- **DC Motor Port M1、M2:** 2pin SH1.0 slot. Connectable with DC motor, supporting forward and reverse rotation control& PWM speed regulation.
- **WS2812 Port D1、D2:** 3pin SH1.0slot. Connectable with WS2812 LED hubs or other light strips that use the WS2812 protocol.
- **Servo Port S1~S4:** 3pin header. Connectable with universal 5V servo motors.
- **Core Slot:** A double-row gray slot. Connectable with multi-function controller core.
- **XH2.54 Power Input:** 2pin XH2.54 slot. Connectable with **7.4V~12.6V** power supply.

## Multi-Function Controller Core

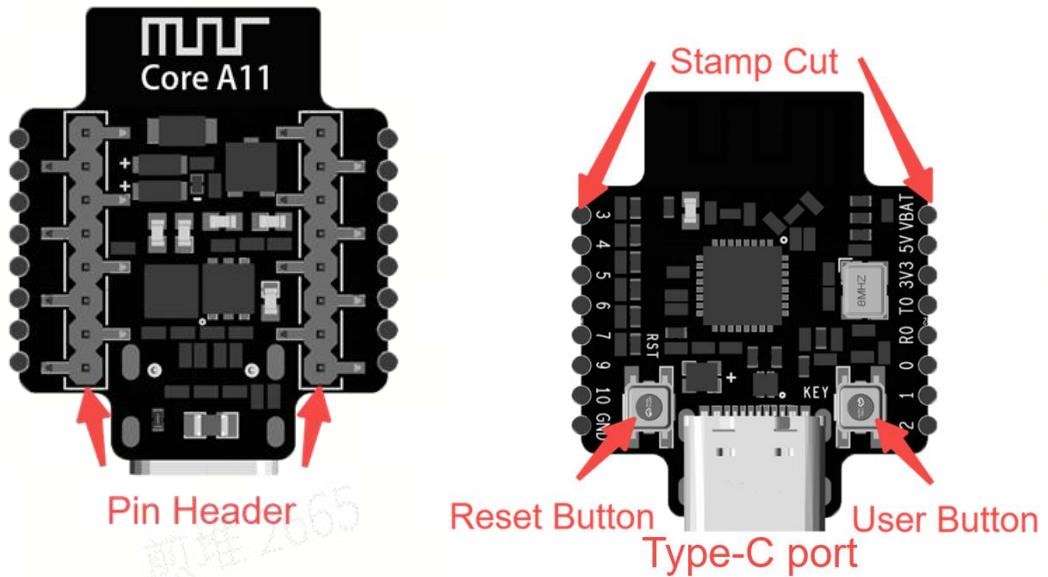


- **Stamp Cut:** Solderable Pinout. It allows users to solder leads to achieve customized circuit connections.
- **Reset Button:** Press to reset main program.
- **User Button:** Custom Function.
- **Type-C Port:** Type-C Port. Connect to the PC via a data cable for programming and burning the program.
- **Pin Header:** Pin Header. Connectable with Shield.


## Hardware connection between controller core and remote control transmitter/receiver shield

As shown in the figure, the controller core, the remote control receiver shield, and the remote control transmitter shield have antenna symbols. When making the connection, it is necessary to ensure that the orientations of these three symbols are the same and the pins correspond to each other one by one.

Orientations of these three symbols are the same.

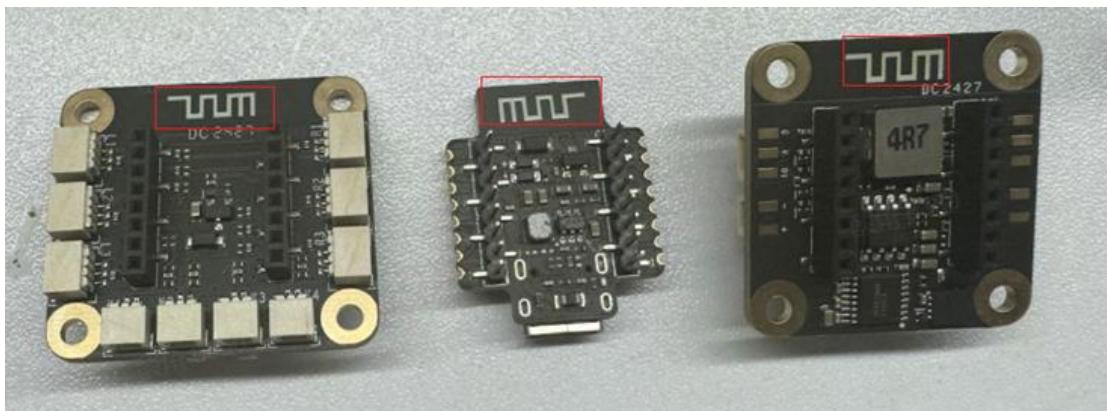

Pins correspond to each other one by one.

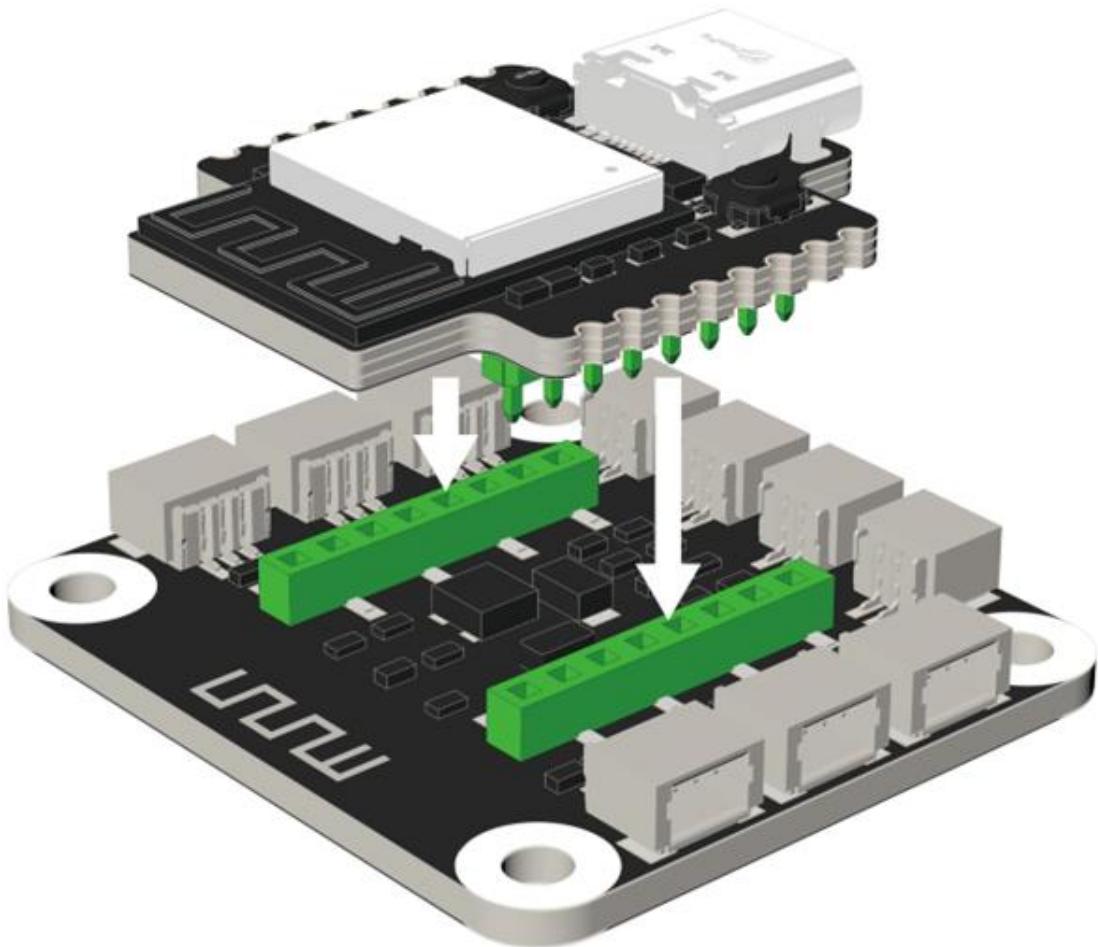


## Definition of the System Status Indicator


- Powered on but not connected: green light on
- Bluetooth connected: blue light on
- 2.4Ghz connected: yellow light on
- Bluetooth& 2.4Ghz connected: light flashes alternately between blue and yellow
- Profile upgrading: green light flashes at a frequency of 2Hz and continues until the transmission ends.
- Control object recognition: The green light flashes at a frequency of 1 Hz for 5 seconds.

## Connect to the RC Transmitter& Receiver on the PC client.


Power the controller core through the Type-C port or the XH2.54 Power Port on the expansion shield.

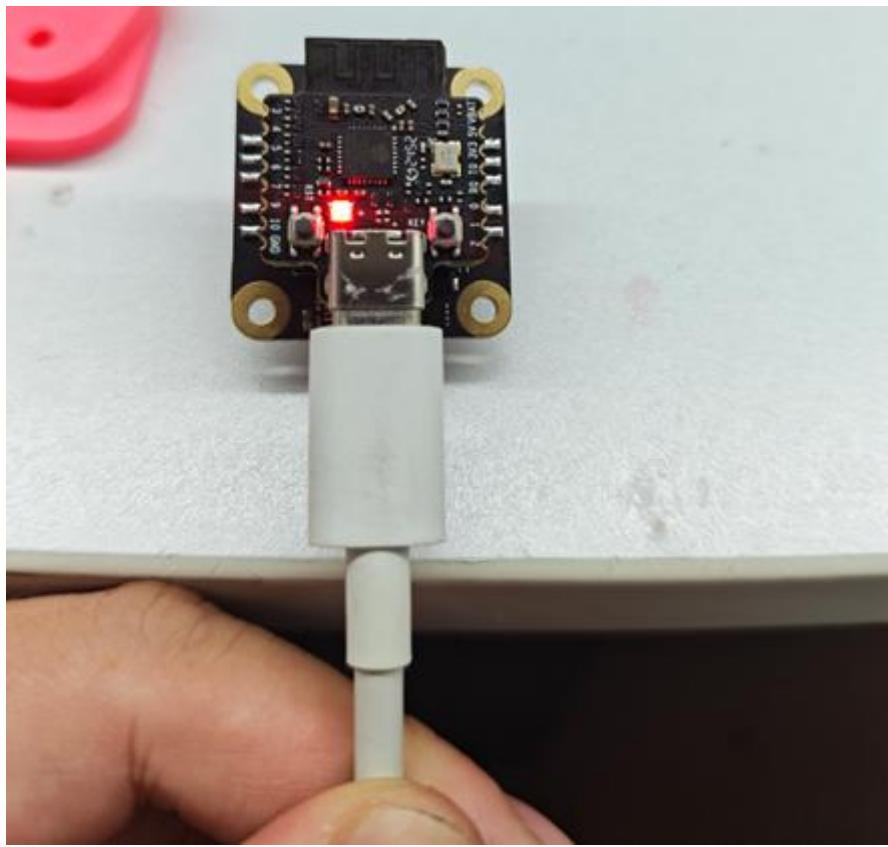


Run CyberBrick client, switch to Device Management

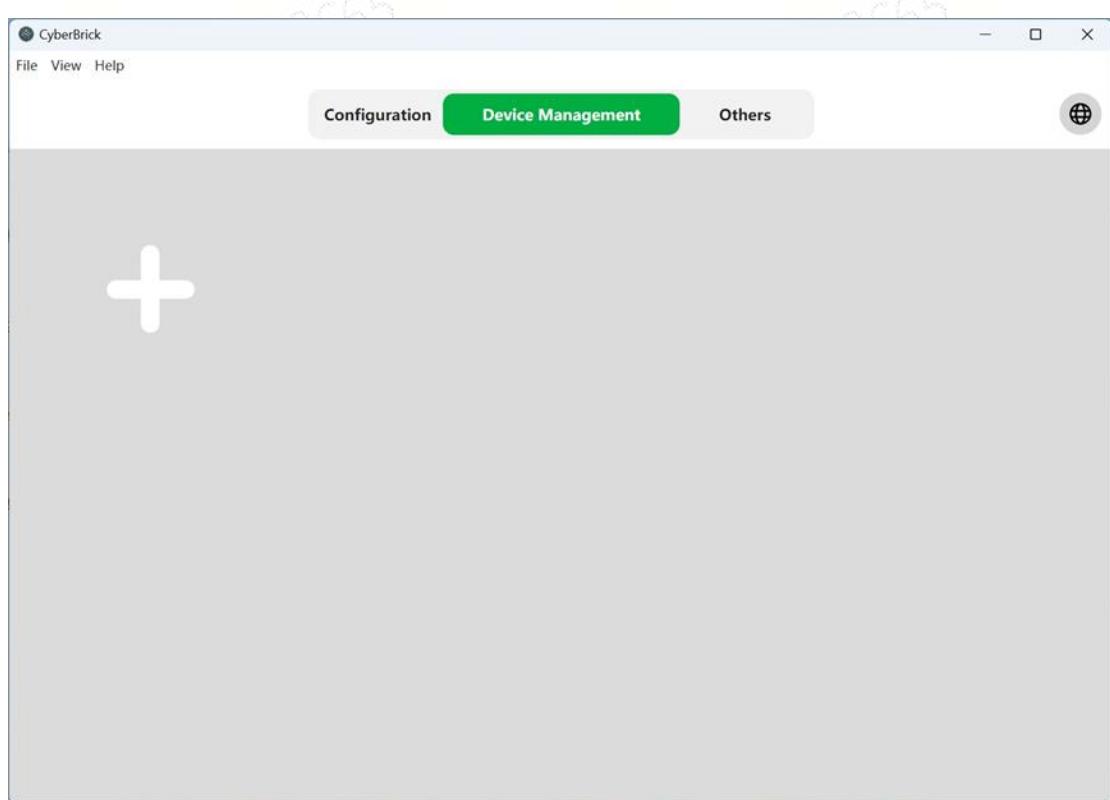


Click [+] to find your device

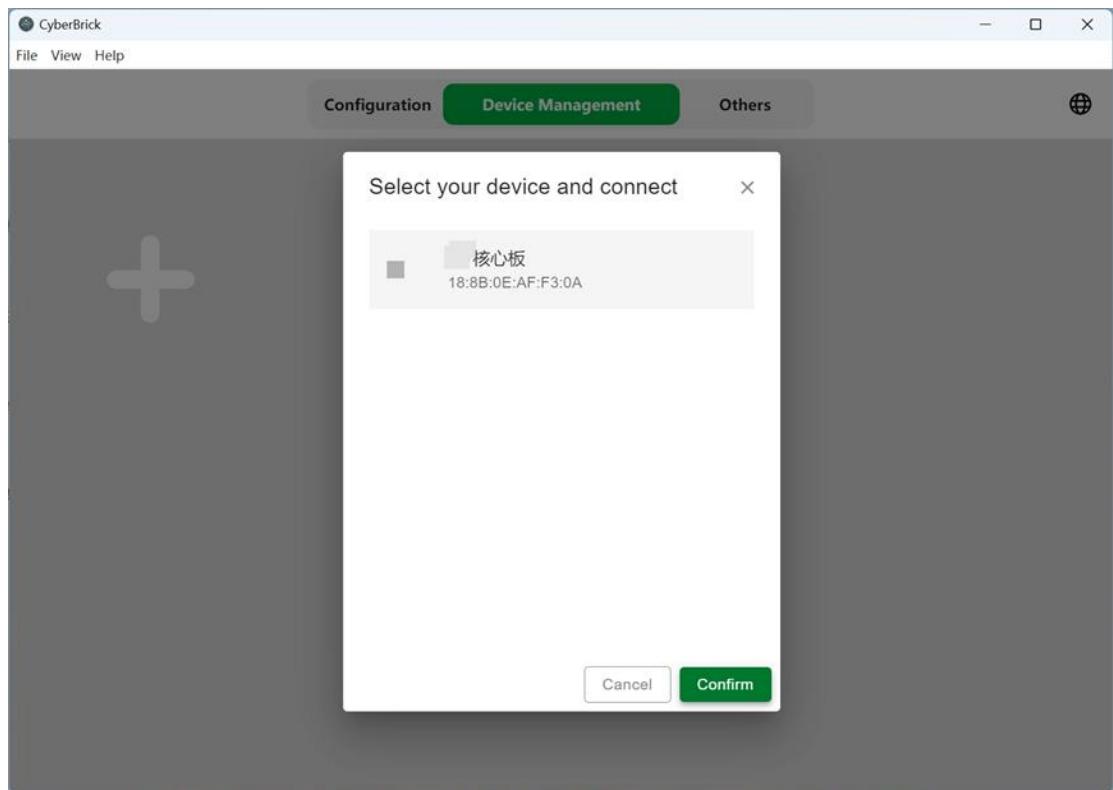


Connect the device by entering the PIN code. If the PIN hasn't been set during the first connection, confirm directly.

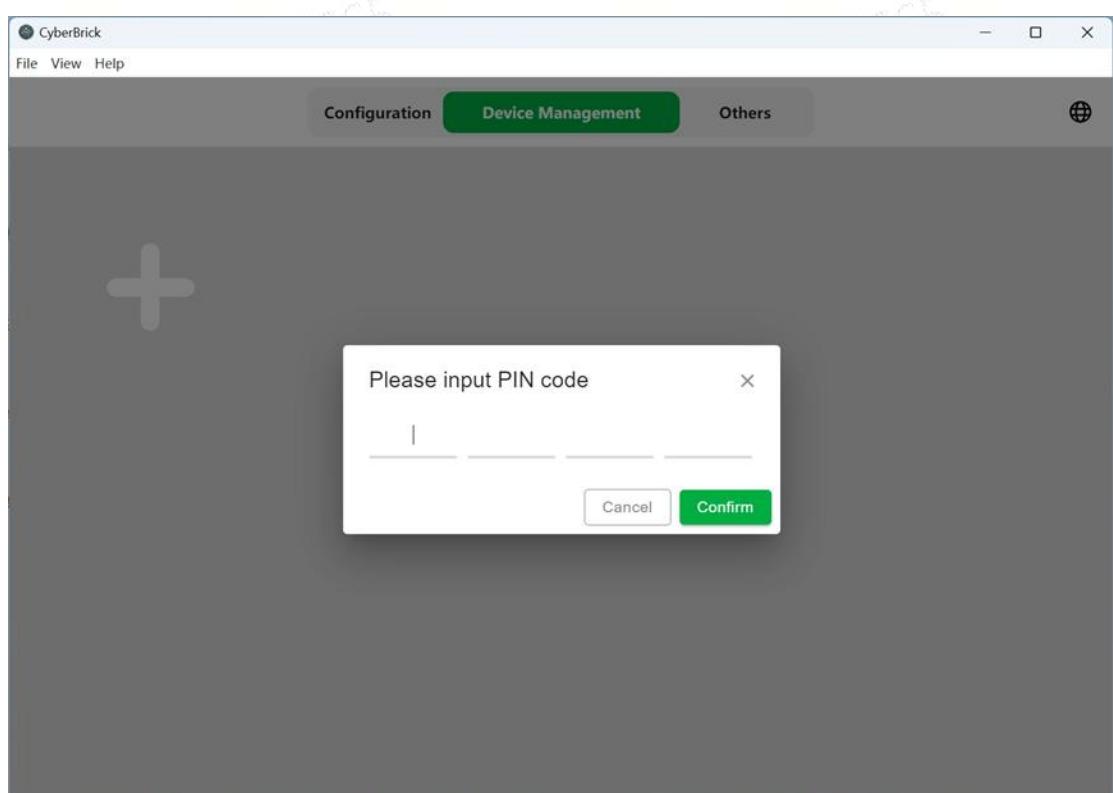

After successful connection, the indicator of controller core lights blue, and the client displays this device.

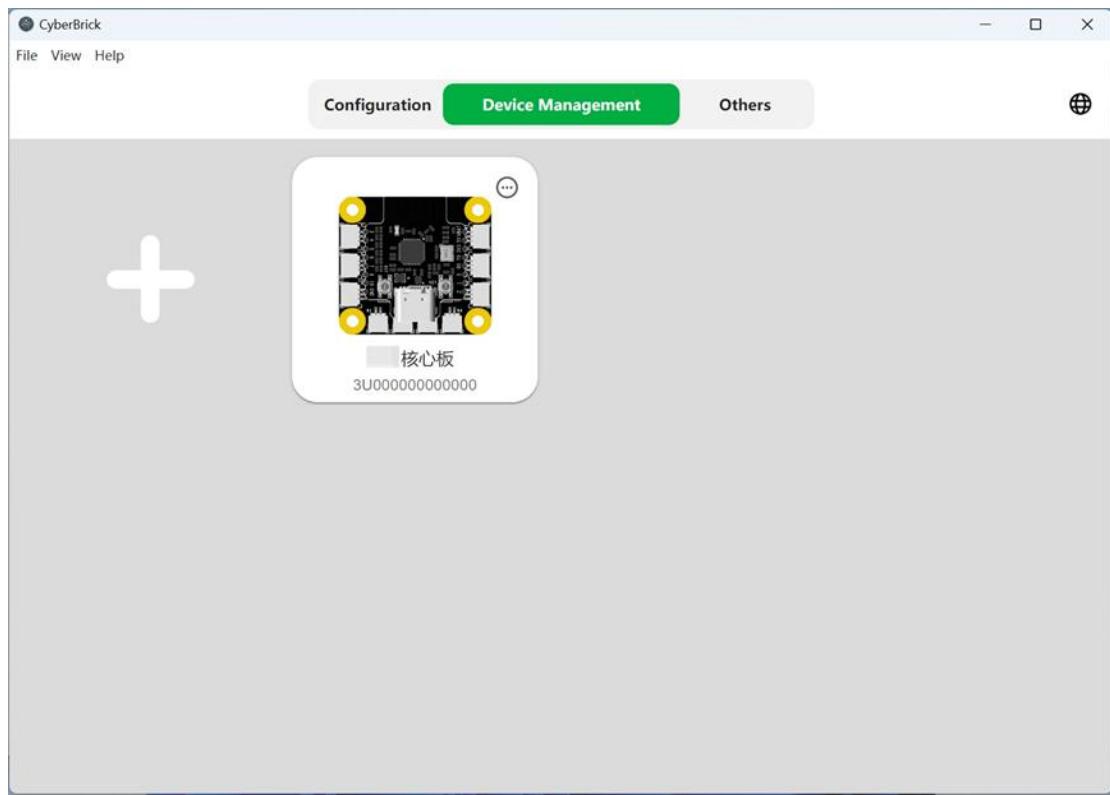


Click on the expansion symbol in the upper right corner of the device. If you have connected multiple devices, click on Recognize, the status indicator of the selected device will flash green; if you need to disconnect with the selected device, click on Disconnect.

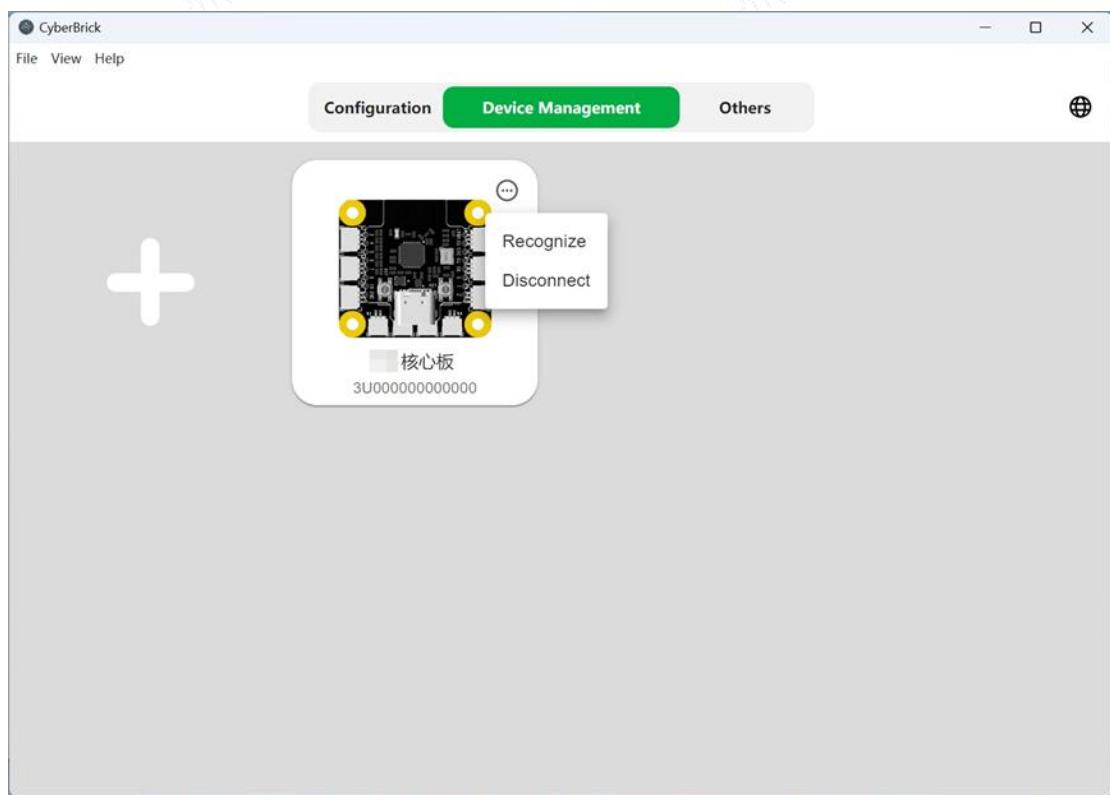


Click on the device, you can change the name of the device in the upper right corner

to make it easier to identify it when there are multiple devices.

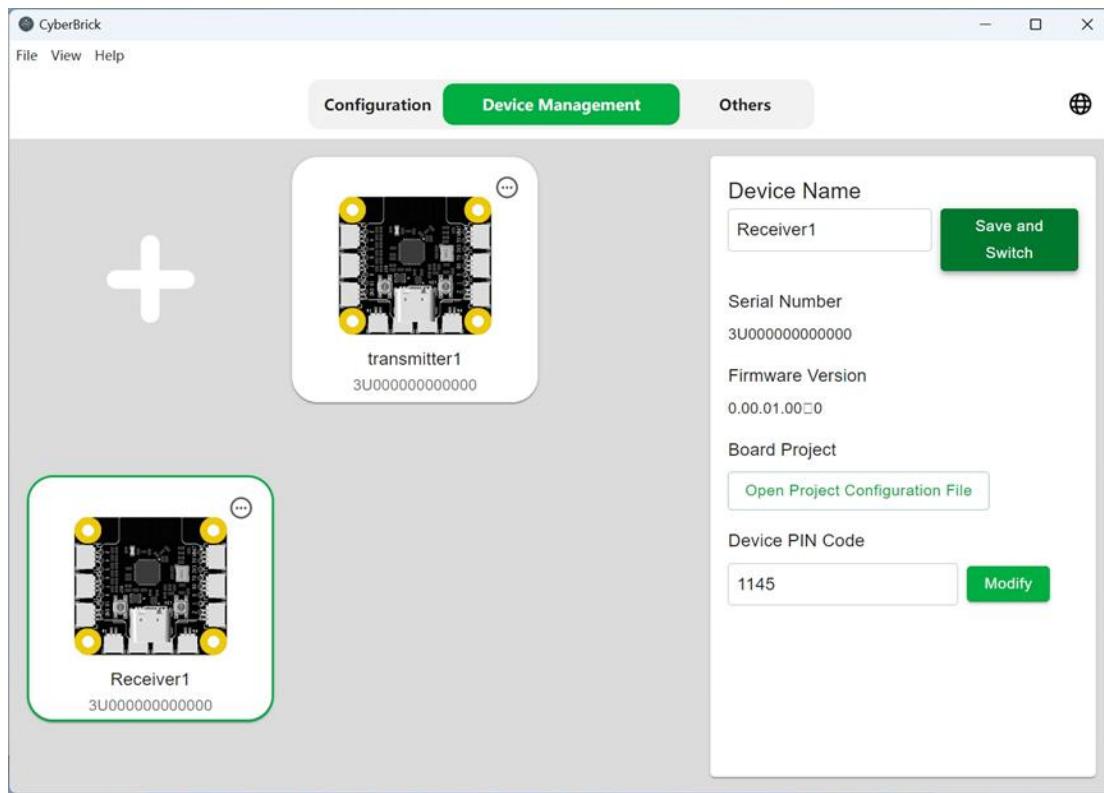


If you need to change the Pin code of the device, you can click **Modify** in the lower right corner and enter the new Pin code.

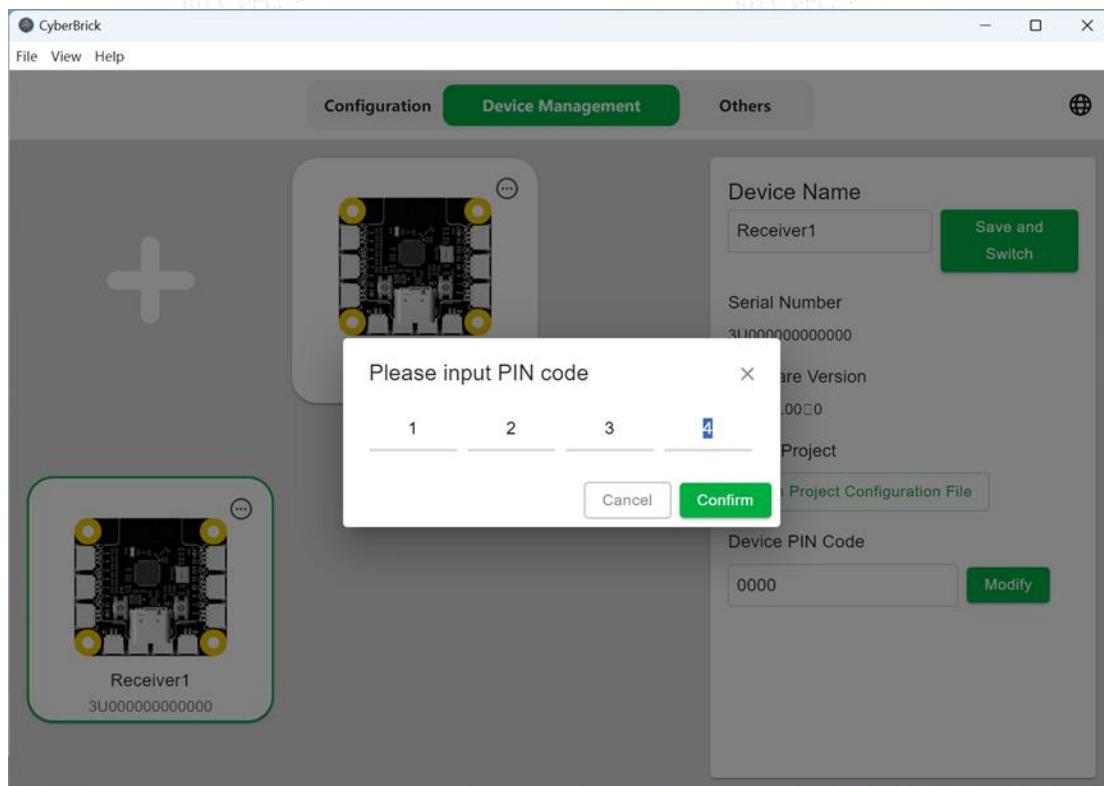


## Configure the core controller profile


Click on the Configuration, click on Create Configuration, and start with a template, or an empty configuration[Custom].

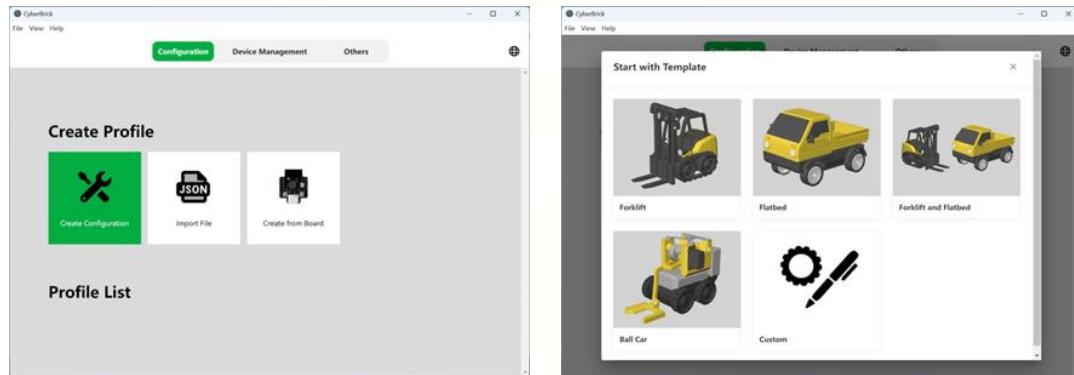


Here we take the custom empty configuration as an example, click on Custom and then click on Edit in the configuration list below.

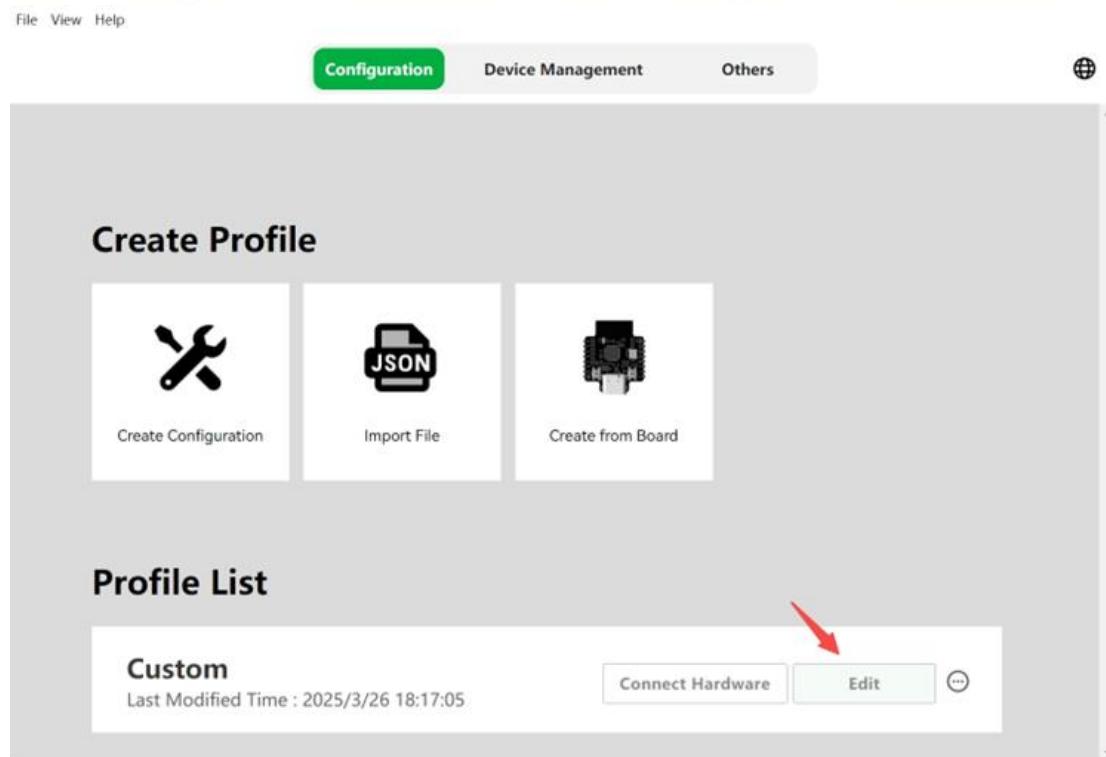


After entering the configuration interface, first, click Add Receiver on the left side, and input the name of the receiver.

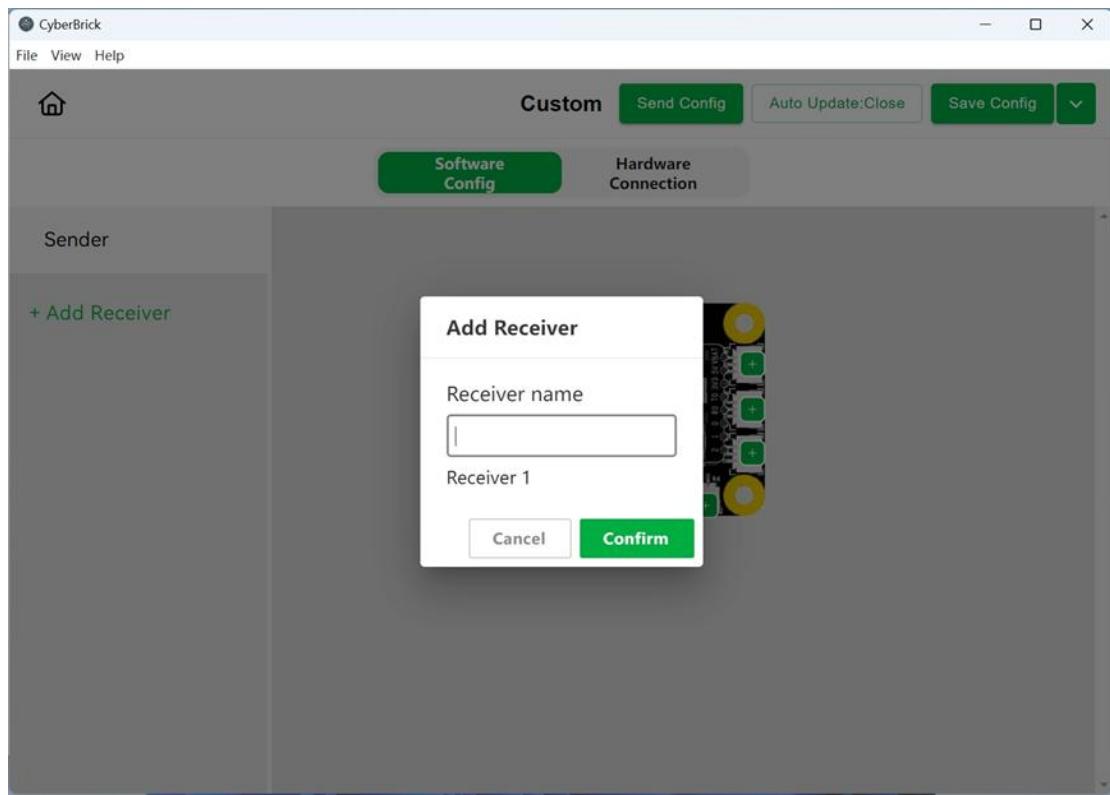

Click on the hardware connection above and drag the receiver device and controller device to the corresponding position.

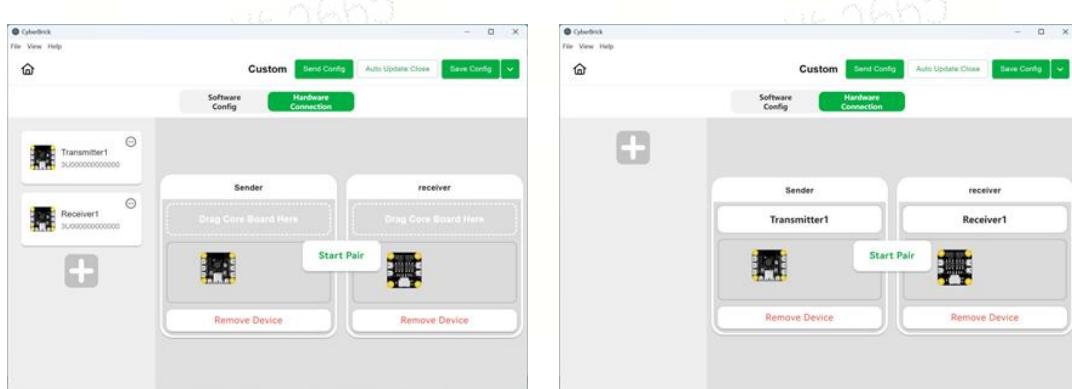


Click to start pairing. After pairing successfully, the status indicators of these devices should flash blue and yellow alternately.

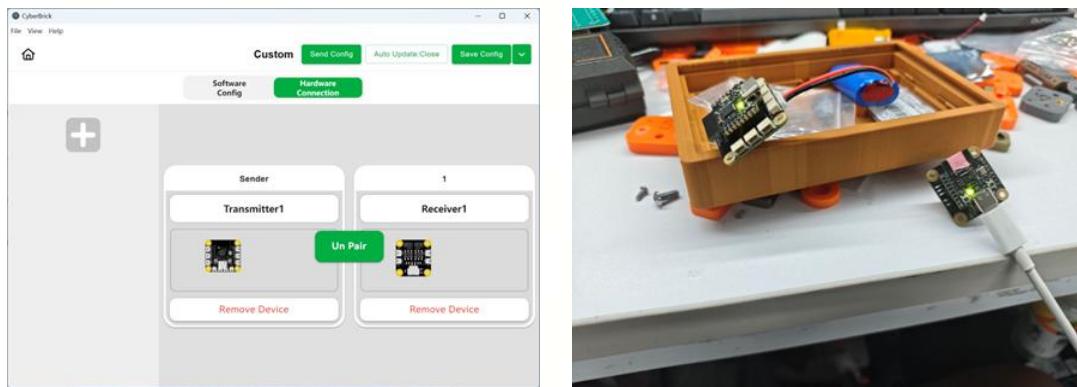

After modifying the configuration, remember to save the configuration locally with Save Config in the upper right corner, and update the configuration to the device with Send Config.

### 3. RC Transmitter Accessories

#### Dual-Axis Joystick Module-XA001

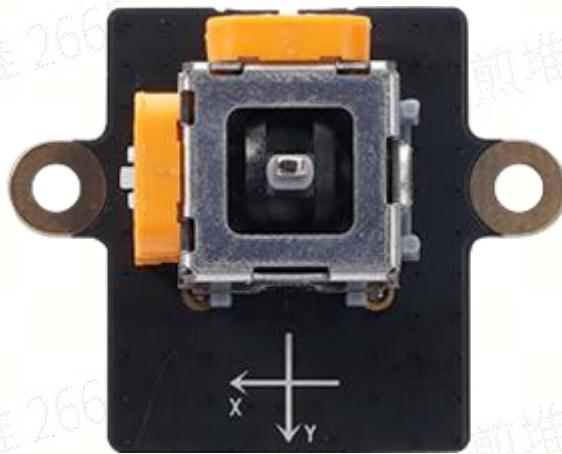


Dual-Axis Joystick Module is a 2CH analog input module. It will auto-return to the center.

The dual-channel joystick is suitable for serving as a control lever in various scenarios where the control of the movement speed and direction is required, especially when these movements are interrelated. For example, in vehicle models, one axis is used to control the moving speed, and the other axis is used to control the steering; or in the model of a tower crane, one axis is used to control the rotation, and the other axis is used to control the distance of trolley car.

#### Hardware Connection


Connect SH1.0-3pin wires to each of the two terminals of the dual-axis joystick

module, and then connect the other end of the wires to the ADC input ports of the remote control transmitter shield.


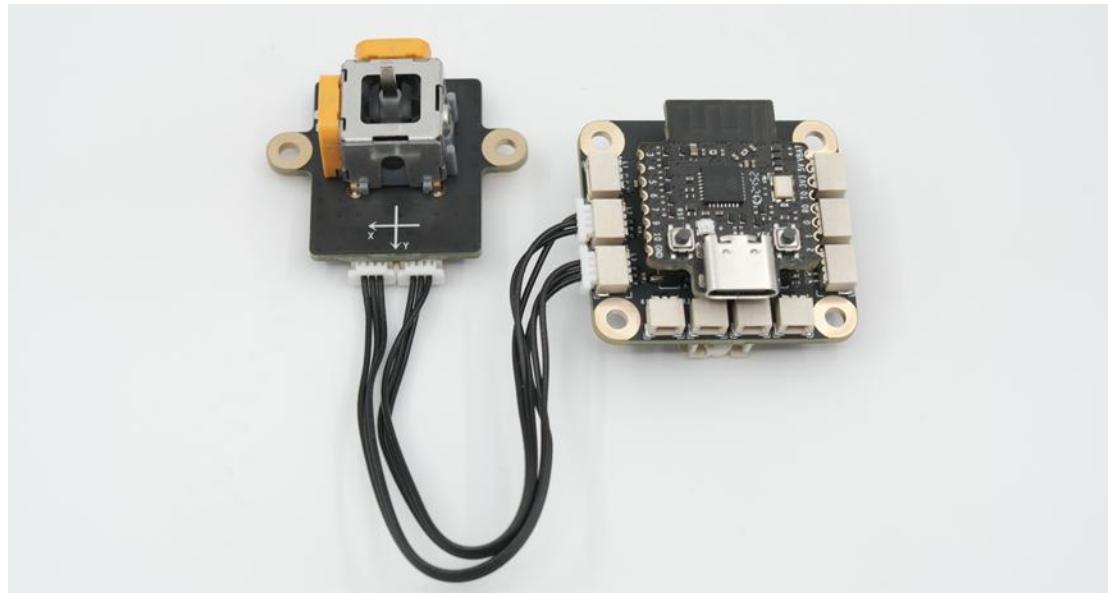


## Software Configuration


In the Sender interface, click [+] of the port to which the X channel of the joystick is connected to, and select Joystick-Add Joystick.

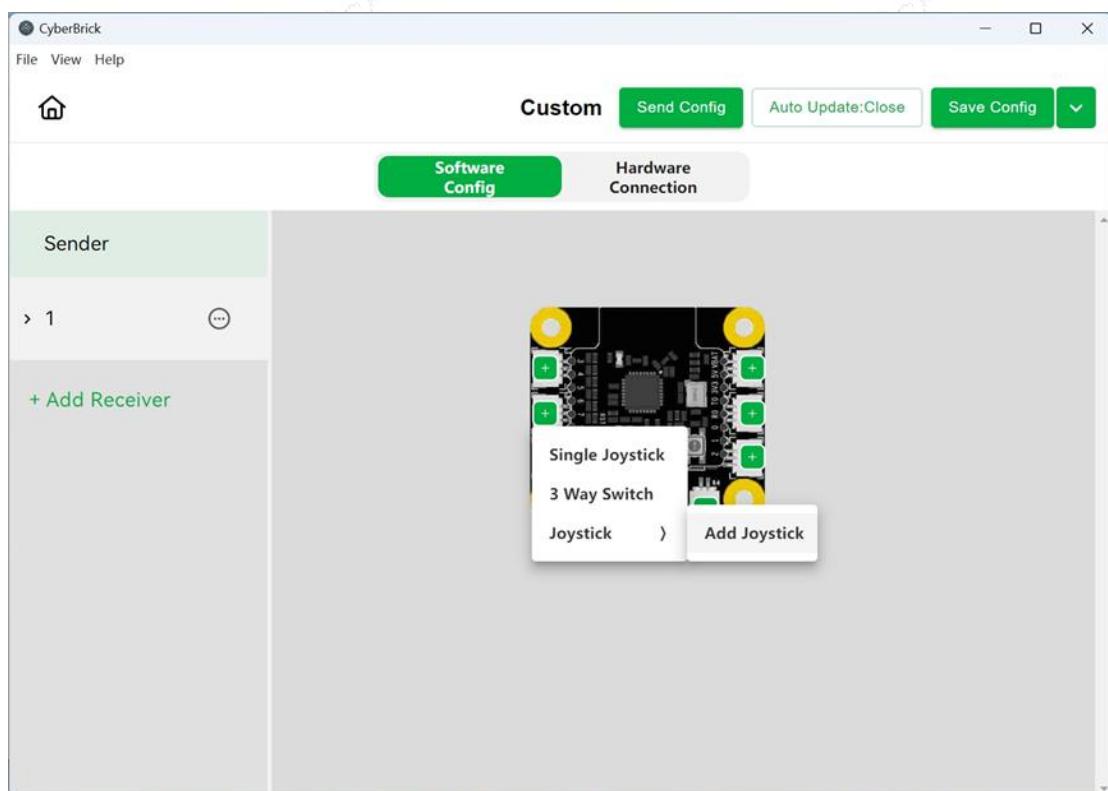


Click on [+] of the port to which the Y channel of the joystick is connected to. Select Joystick- joystick[x] yChannel.

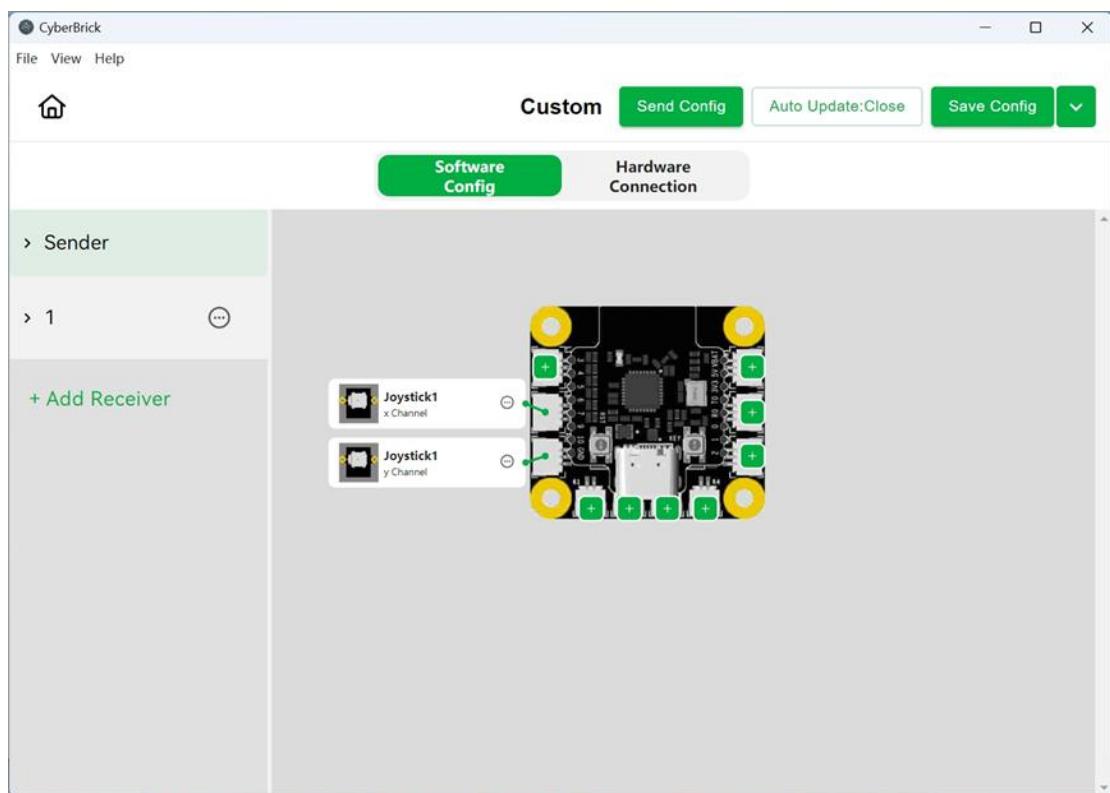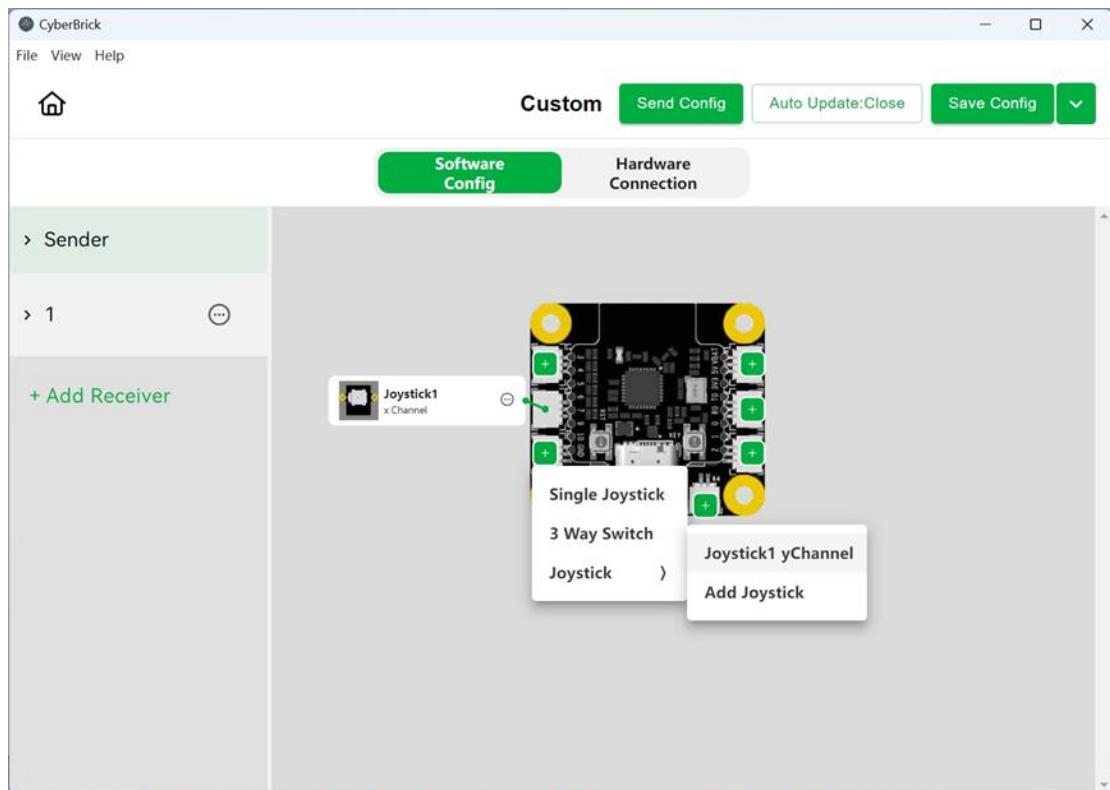


When using multiple joysticks, the joysticks can be renamed for easier recognition

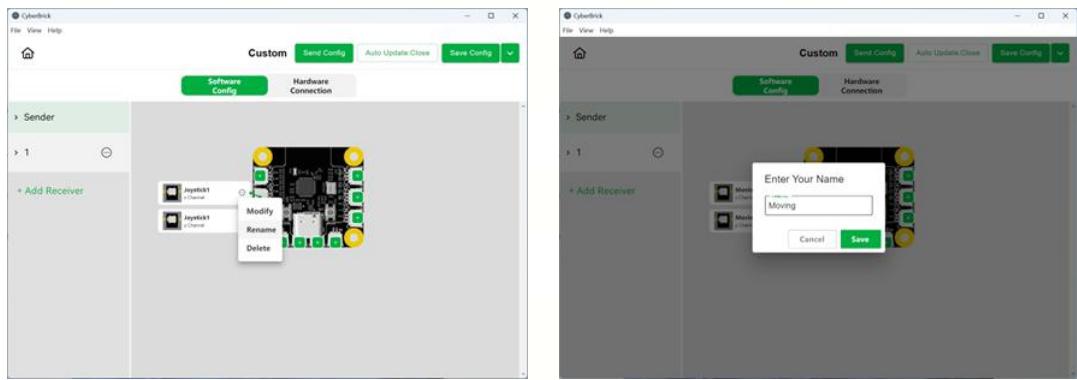


Click Delete to remove port config

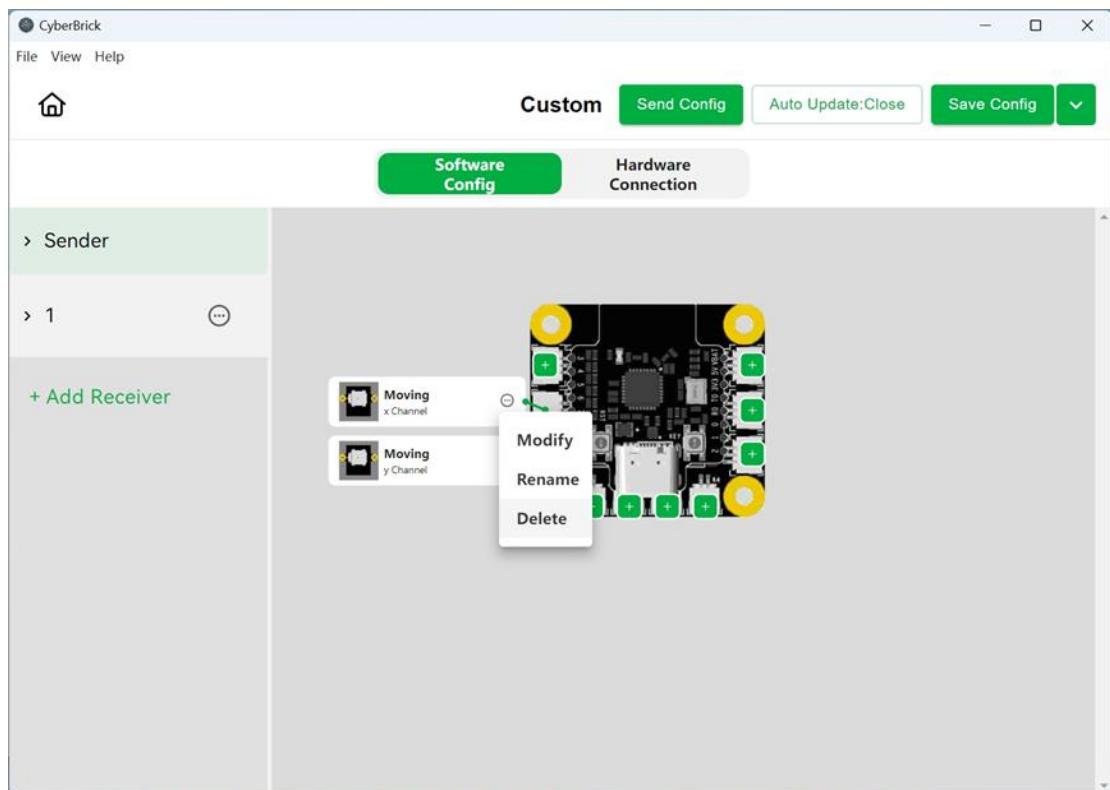

Click Modify to enter control config interface

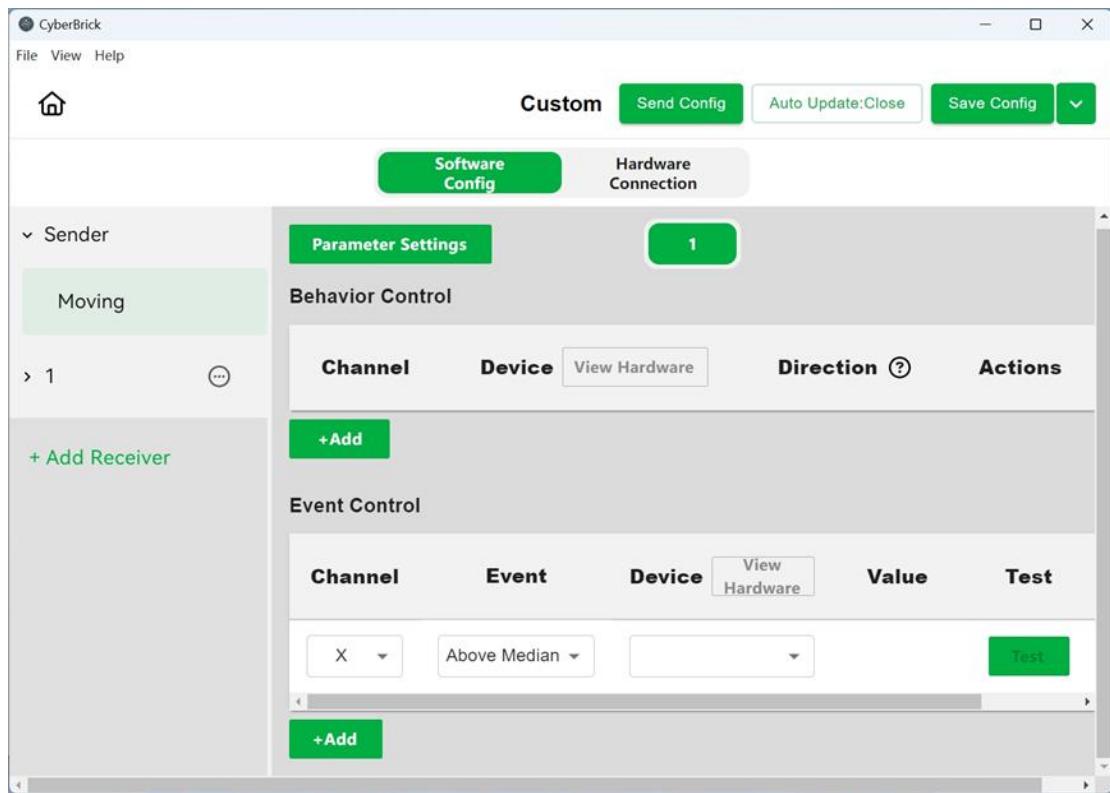

Behavior control will make the corresponding device output with the analogue value of the channel. It's commonly used in joystick control of the speed of motor, the angle of the servo and so on. Click View Hardware next to the View to check the receiver's hardware connection config status.

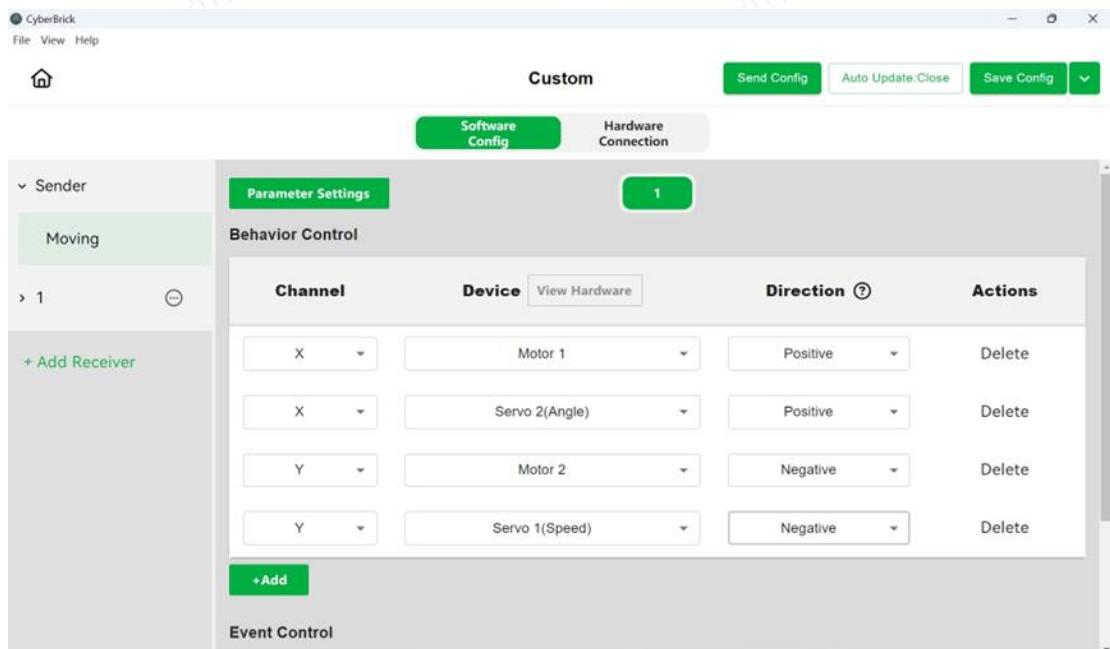

Event control consists of three cases for each channel, Above, Equal and Below Median. When the joystick crosses a zone, it controls the state of a certain device. This can be used to bind, for example, the status of the turn signal to the status of the steering.


Event Control

Channel	Event	Device	Value	Test	Action
X	Above Median	Motor 1	75 %	<input type="button" value="Test"/>	Delete
X	Below Median	Motor 1	-75 %	<input type="button" value="Test"/>	Delete
X	Equal Median	Motor 1	0 %	<input type="button" value="Test"/>	Delete
Y	Above Median	Servo 2(Angle)	75 °	<input type="button" value="Test"/>	Delete
Y	Below Median	Servo 2(Angle)	150 °	<input type="button" value="Test"/>	Delete


When the joystick is found to be drifting, use the Parameter Settings to calibrate the Midpoint and adjust the Dead Zone Size.

Parameter Settings

Channel	Device	View Hardware	Direction	Actions
+Add				

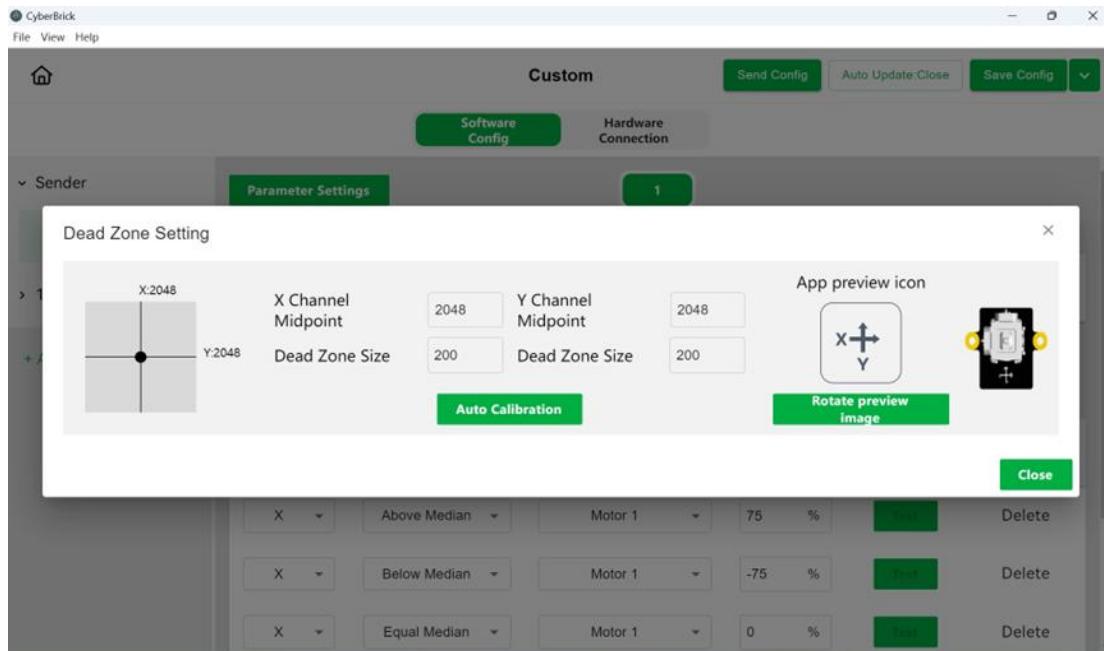

## Single-Axis Joystick Module-XA009

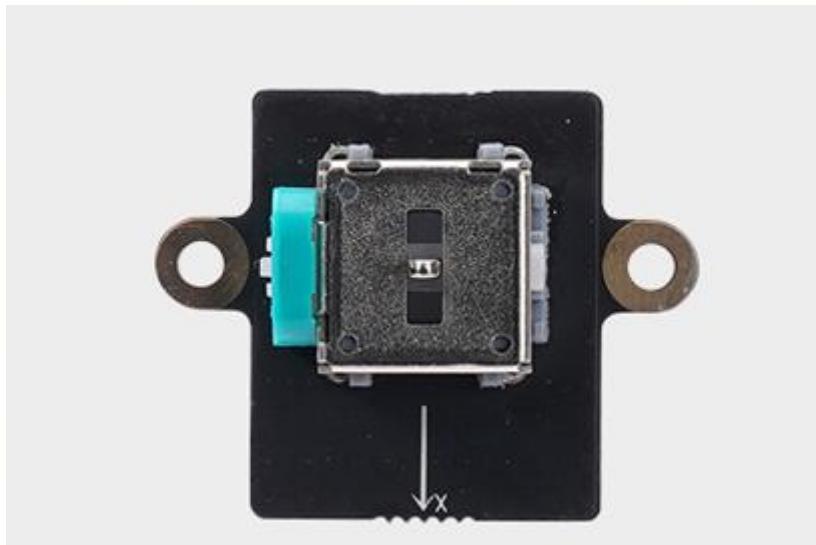


Single-Axis Joystick Module is a 1CH analog input module. It will auto-return to the center.

Compared with the dual-axis joystick, the single-axis joystick can only move in one direction and output one analogue signal, which is suitable to be used as a control lever in various scenarios that need to control the speed of motion or control the position that often returns to the center, especially when the control logic of these motions needs to be independent. For example, in the vehicle model, a single-axis stick module to control the speed of movement, another single-axis stick module to control the steering wheel; or in the tower crane model, a single-channel rocker module to control the hook lifting; or in the tracked vehicle model, two single-axis joystick modules to individually control the speed of both sides of the track.


## Hardware Connection

Connect a SH1.0-3pin wire to the terminal of the single-axis joystick module, and connect the other end of the wire to the ADC channel inputs on both sides of the remote control transmitter shield.

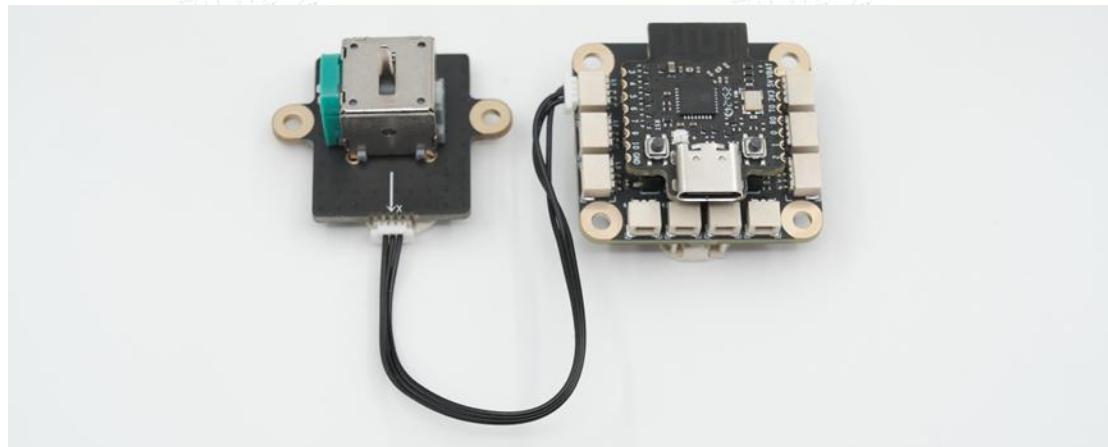

## Software Configuration

Similar to the dual-axis joystick module, click [+] on the ADC port to add a Single Joystick.

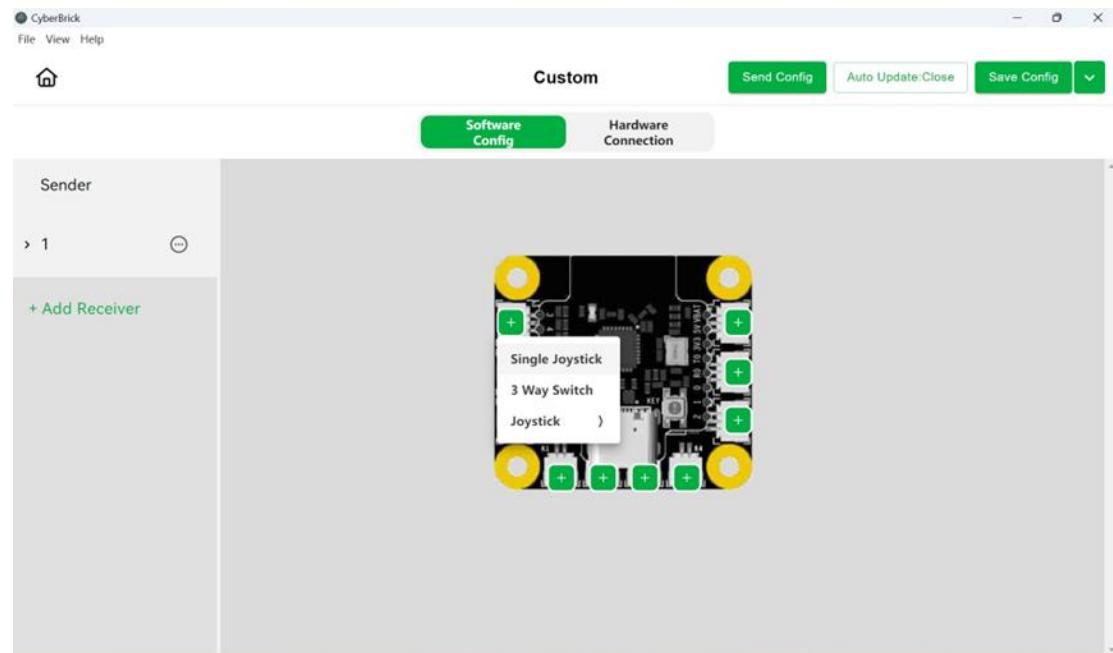

The configuration of single-axis joystick module is the same as that of dual-axis joystick, except that there is only one channel. Please refer to the software configuration section of the dual-axis joystick module for configuration.

## Three-Position Rocker Switch Module-XA010




Three-position rocker switch module is a 1CH input module with 3 status.

Three-position rocker switch module can be fixed on the left, center and right states, so it is very suitable as a state switch in various scenarios that need to switch the state of lights, deformation and so on. For example, it can be used to switch the lights on and off in vehicle models, or to switch the vehicles controlled by the remote control when it is used for one-to-many control.


## Hardware Connection

Connect a SH1.0-3pin wire to the terminal of the Three-position rocker switch module, and connect the other end of the wire to the ADC channel inputs on both sides of the remote control transmitter shield.

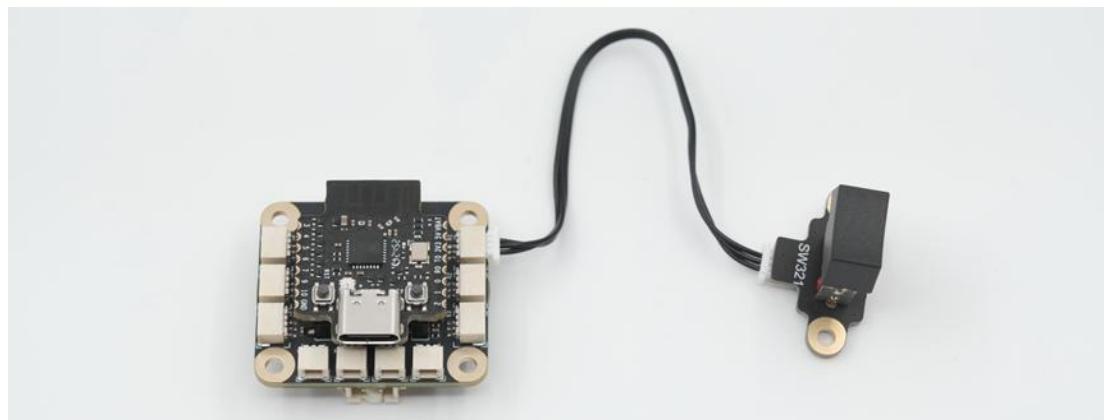


## Software Configuration


Click [+] on the ADC port in the configuration interface and select 3 Way Switch.

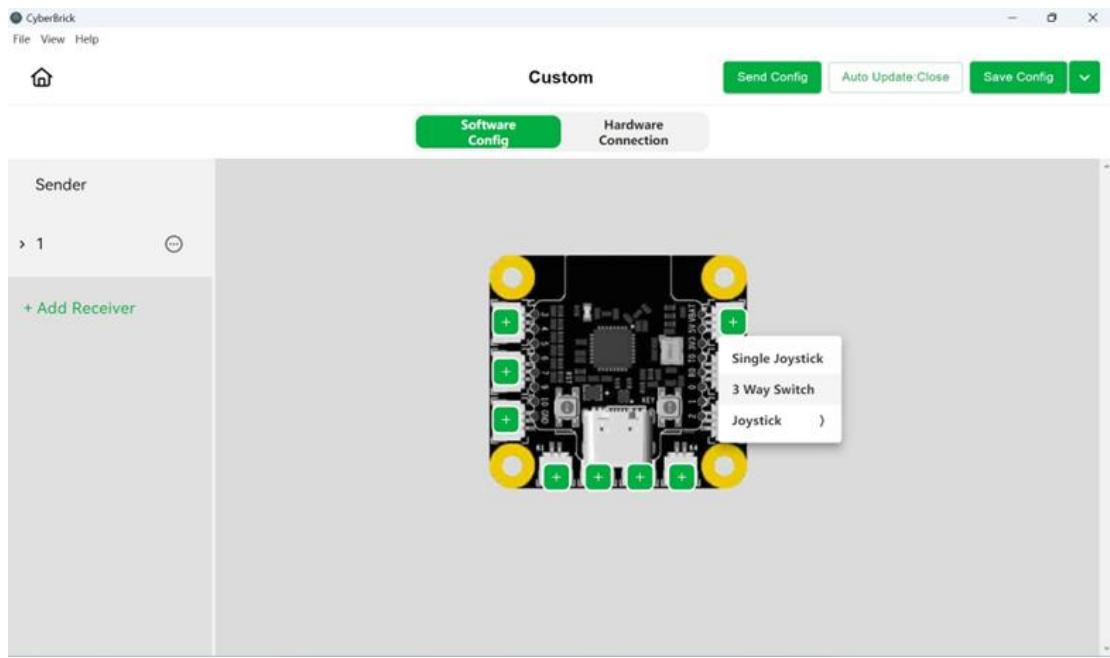

In the Modify interface of the 3 Way Switch, you can set the state of the device corresponding to the switch state, such as the light effect of the light, the speed of the motor, the position of the servo , etc. It's suitable for switching light state, controlling model deformation and other scenes.

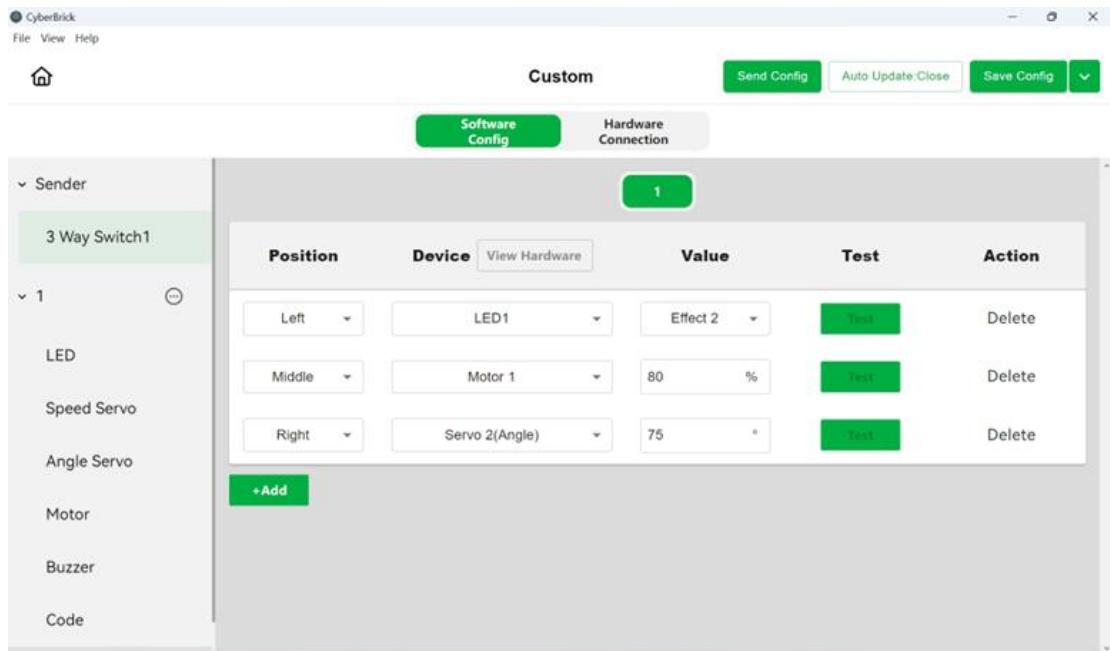

## Power Switch Module-XA007

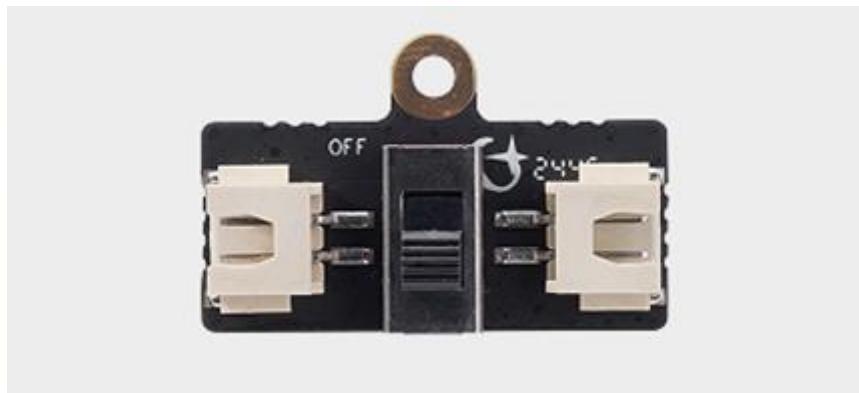


Power switch module is a two-position switch that is often used to control power on/off without removing the battery.

There are two 2pinXH2.54 connectors on the switch board, which are usually connected in series between the power supply and the expansion board. The switch board can be used to cut off the power supply without removing the battery directly, avoiding the continuous standby state that causes the battery to lose power as well.

## Hardware Connection

Connect a power supply to one terminal of the power switch module, and connect the other terminal to a XH2.54 2P wire. Then connect the other end of the wire to the XH2.54 power input of expansion shield.

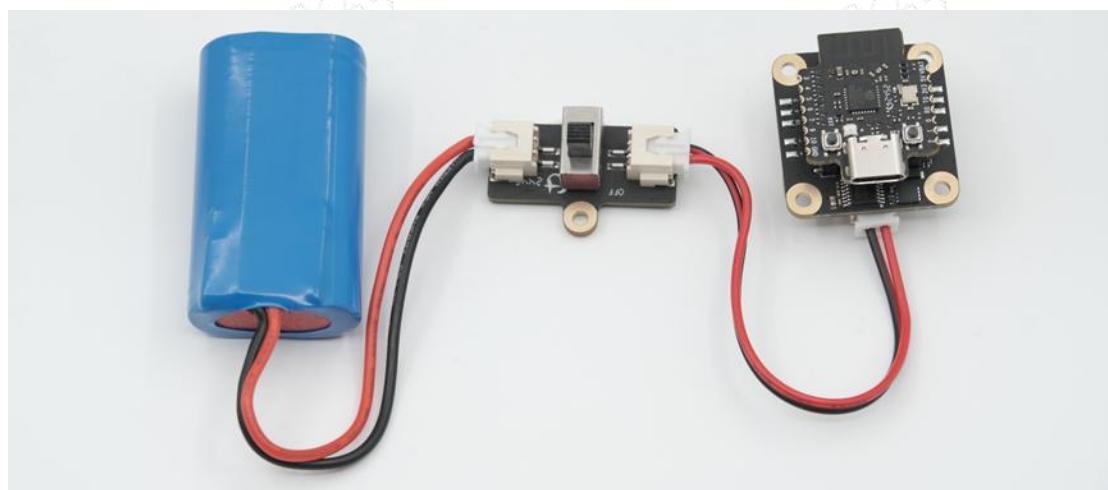

## Momentary Button Module-XA008




Momentary button module is a binary input module. Different signals can be sent by short press, long press, press and lift and other actions.

Compared to a three-position rocker switch module, a momentary button module has only two states: pressed and flicked up, and it always returns to flicked up. The momentary button module can be used to switch between various modes in a specified order, trigger and stop some actions in real time. For example, triggering a shot on a model with a shooting mechanism, or switching the mode and color of lights on a model with RGB lights.


## Hardware Connection

Connect the SH1.0 2P wire to the terminal of the momentary button module, and connect the other end of the wire to the digital signal input port on the bottom of the remote control transmitter shield.

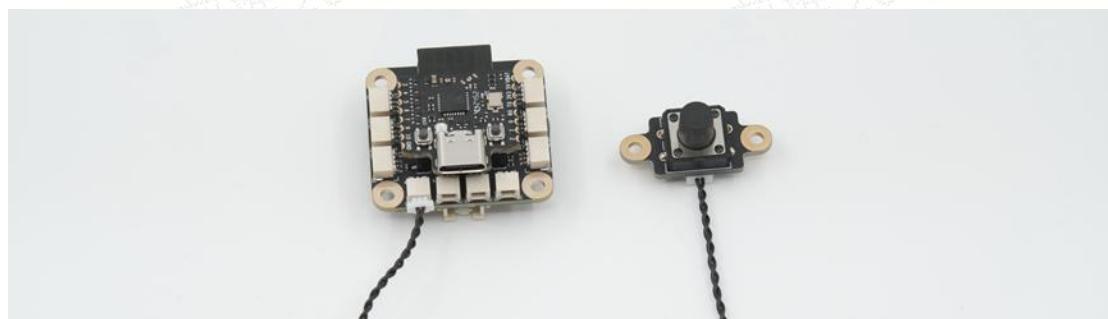


## Software Configuration

Click [+] on the digital port at the bottom of the configuration interface to select the button module.

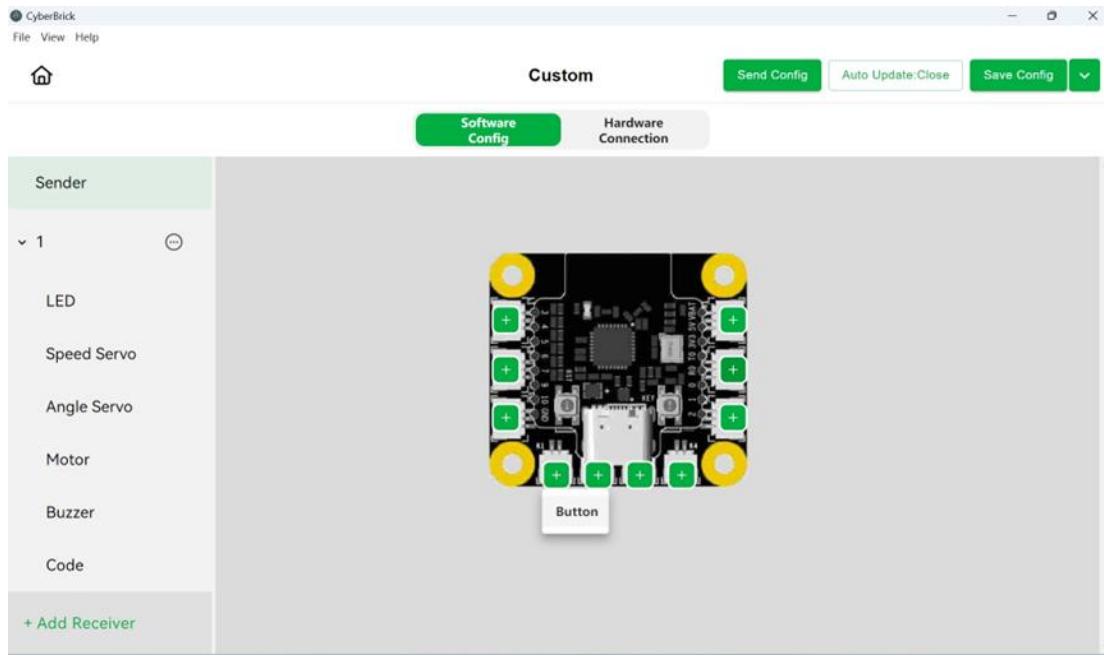

In the Modify interface of button, you can control the state value switching of the corresponding components through short press, long press, press and release actions of the button.

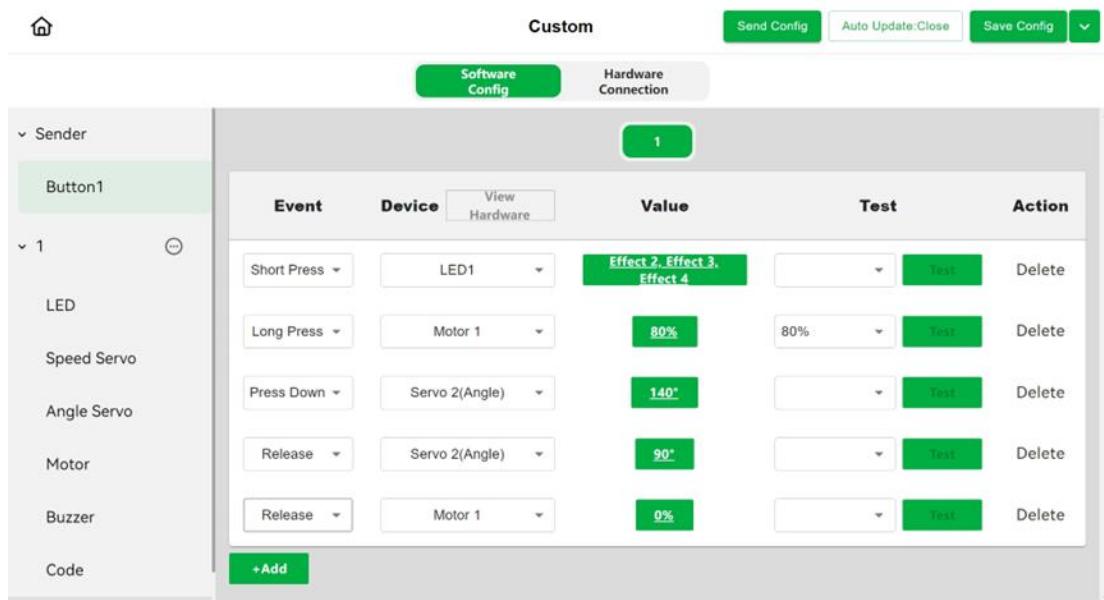

Click Value to add multiple state values. It will switch in order after the button action.

## 4. RC Receiver Accessories

### WS2812RGB LED-KB003




The WS2812 RGB LED is a LED board with connecting cable. It can be controlled using the WS2812 protocol and can emit multiple colors of light.

Used together with the WS2812 LED Hub-XA006, multiple WS2812 RGB LEDs can provide various kinds of visual effects, which is suitable for all kinds of models that need lighting, such as lamps on vehicle models.

## Hardware Connection

Insert the plug of the WS2812 RGB LED into the terminal of the WS2812 LED hub.

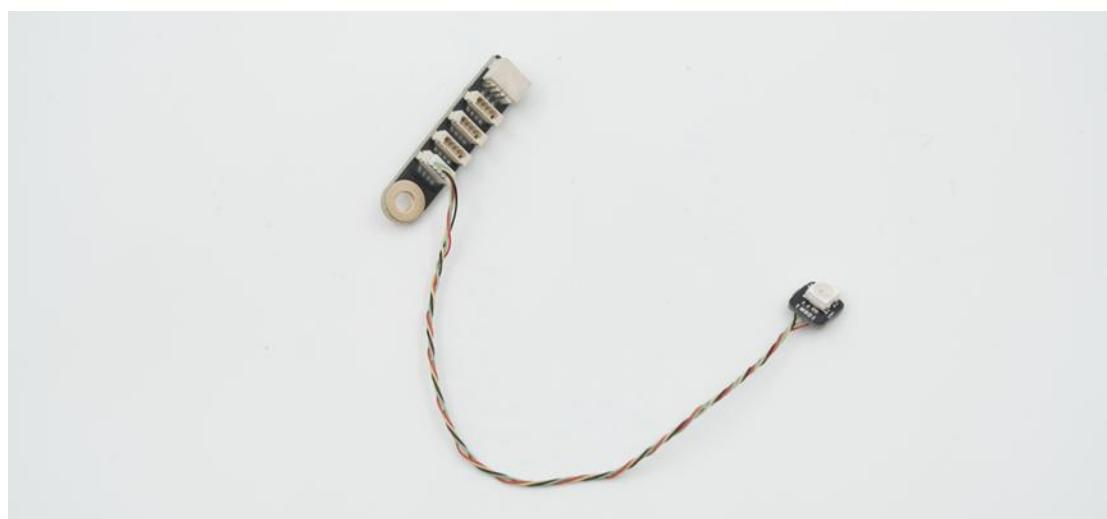

## Software Configuration

Needs to be used in conjunction with the WS2812 LED Hub, see details below.


## WS2812 LED Hub-XA006



The WS2812 LED Hub is used to connect the LEDs supporting WS2812 protocol to the WS2812 Port on the RC receiver shield, thus enabling independent control of more LEDs. It is suitable for all kinds of models that need to use multiple LEDs.


### Hardware Connection

Connect the horizontal 3pinSH1.0 ports to the 3pinSH1.0 connecting wire, and the other end of the wire to the LED ports on both sides of the RC receiver shield. Connect the plugs of WS2812 RGB LED to the 4 vertical ports.

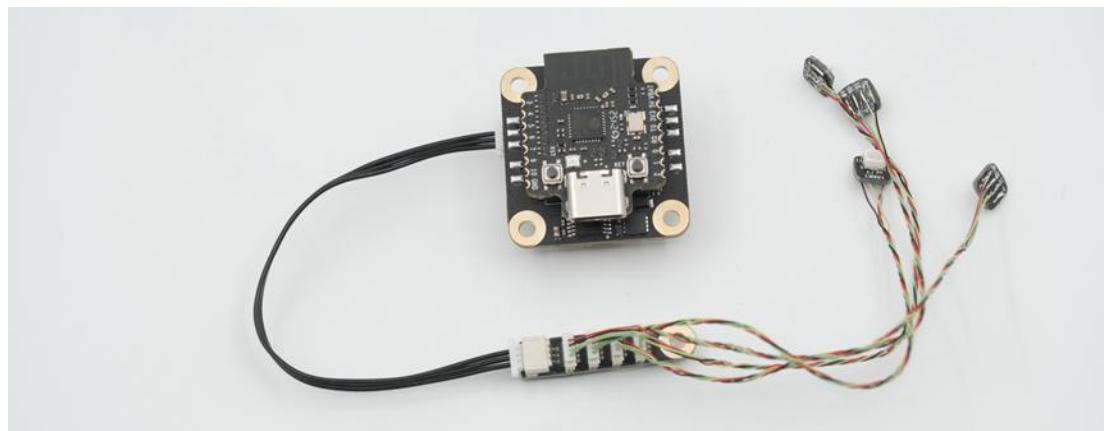


### Software Configuration

Click on the left side of the interface to switch to the receiver, click on the WS2812 port to add WS2812 LED Hub.

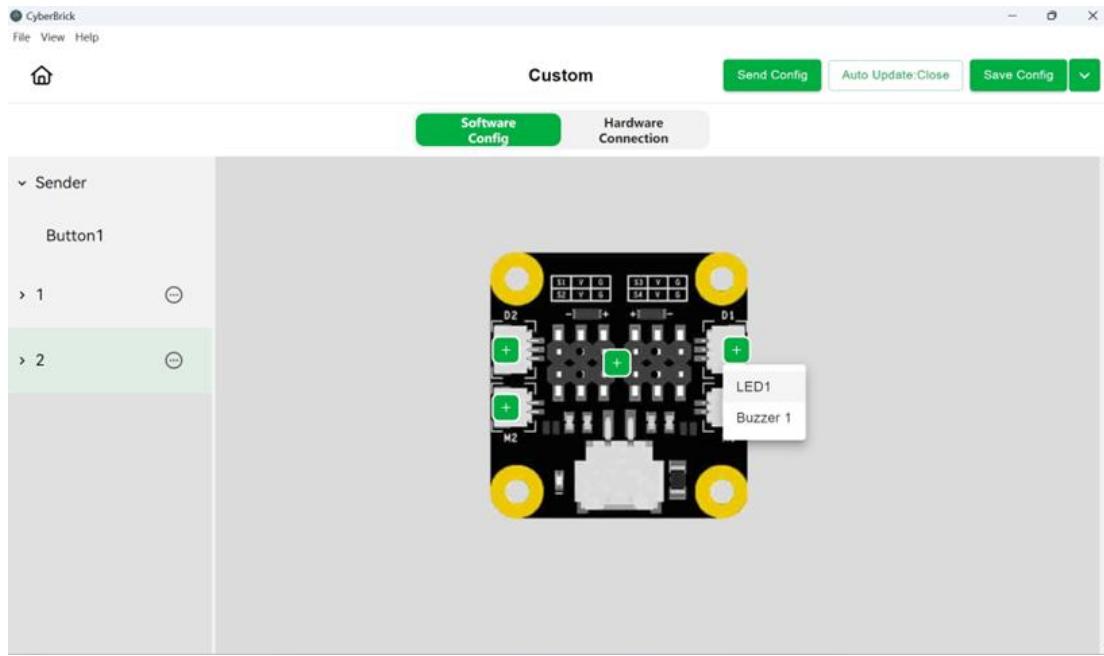

In the Modify interface, click on 1234 under the Activated LED to select the LED to be controlled by this effect. Select the light effect as Blinking or Steady in Mode. Select the color of the lamp in Color. Set the blinking frequency in Repeat Times and Time.

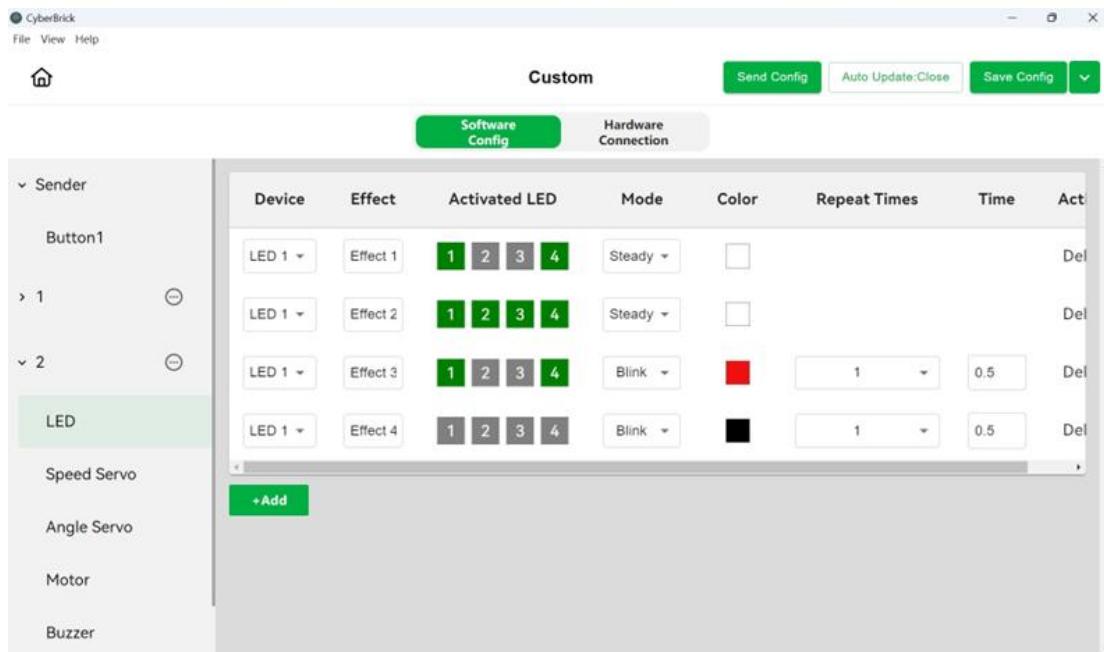

## 030Micro DC Motor -LA024




The 030 micro DC motor is a small size brushed motor.。

The 030 micro DC motor is balanced in size and power, and can be combined with different reduction ratios to form a variety of speeds of single/twin shaft reduction motors, suitable for all kinds of models that have the need for continuous motion, but do not need a very precise speed. For example, chassis drive motors for vehicle models, drive motors for turntables, etc.


## Hardware Connection

Connect the plugs of the 030 micro DC motor to the DC motor ports on both sides of the RC receiver shield.

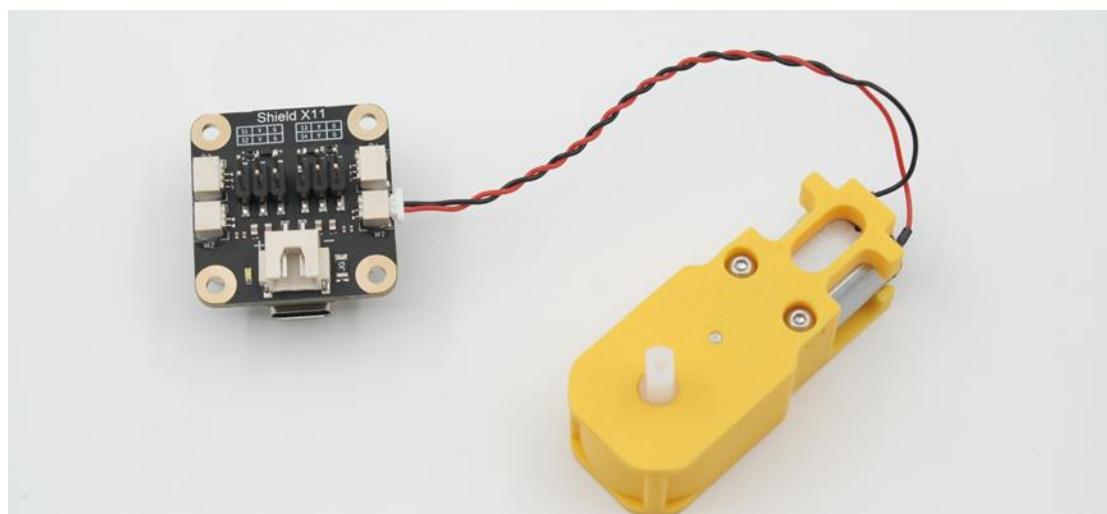



## Software Configuration

Click [+] of DC Motor port to add Motor

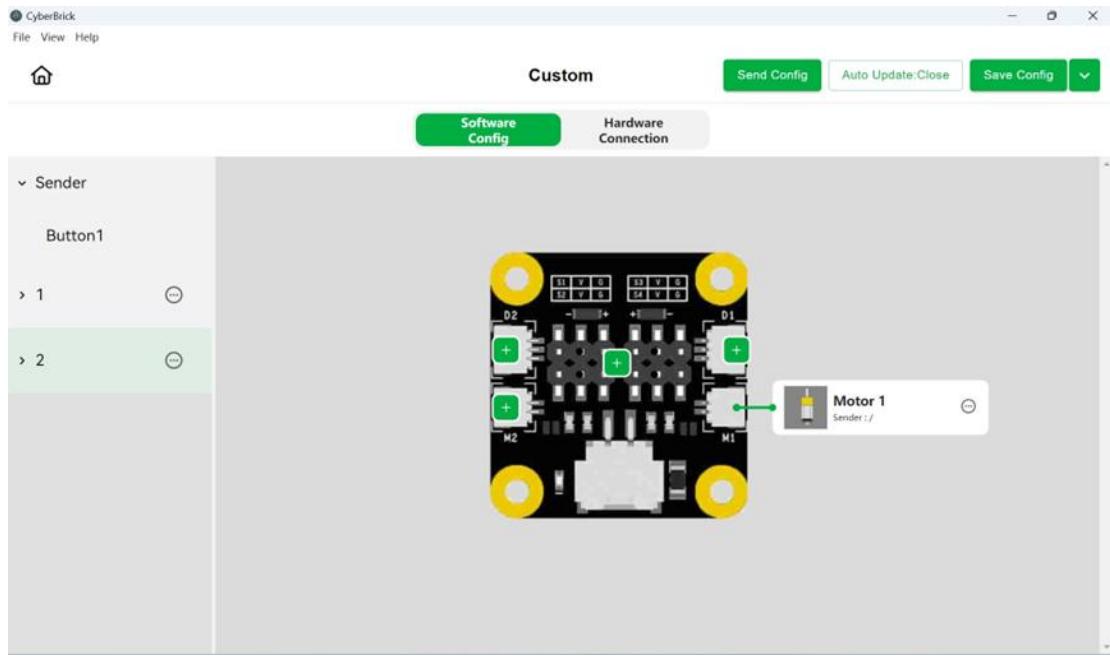

Adjust the maximum speed and bias for forward and reverse motor rotation in the Modify interface. The Haptic Optimization allows the relationship between the joystick value and the motor speed to become non-linearly proportional (not a first-order linear relationship), so that the low-speed control is more accurate and the high-speed response is faster. You can specifically adjust the effect of haptic optimization in Edit.

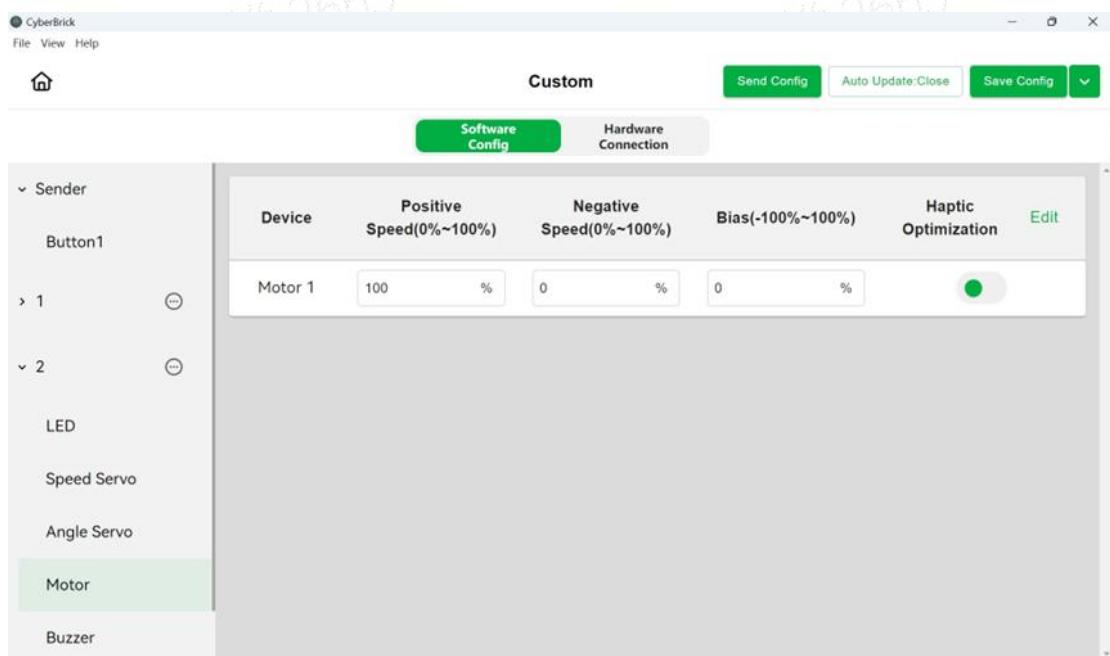

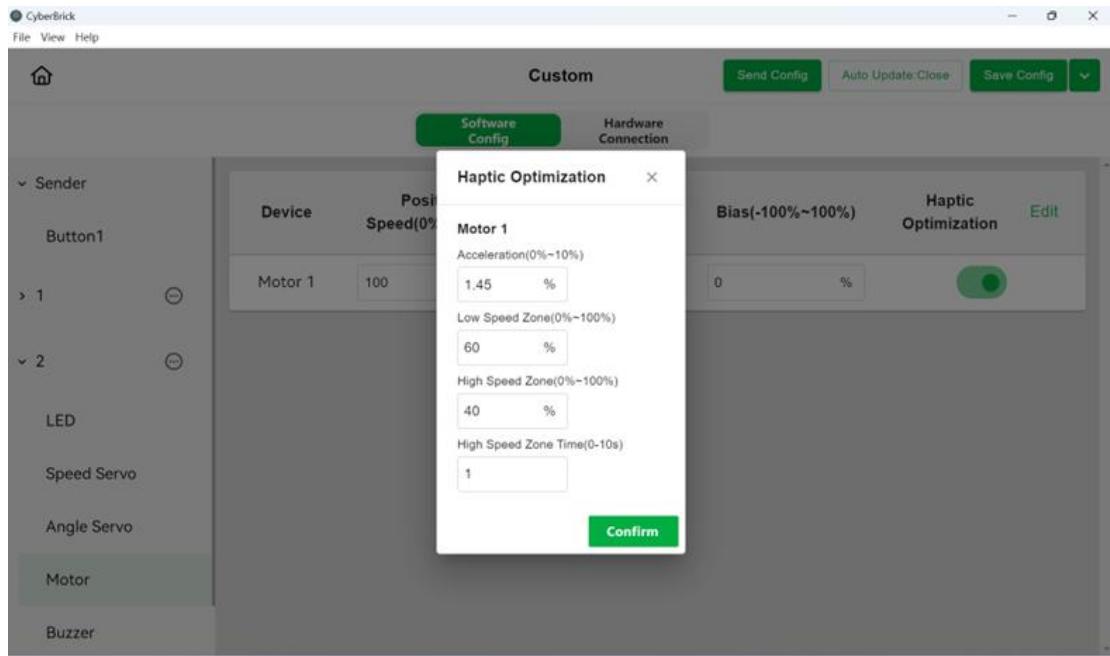

## N20 Reduction Gear Motor-LA002~LA008




The N20 reduction gear motor is a miniature size DC brushed motor.

The N20 reduction gear motor is smaller in size than the 030 micro DC motor. Various output shaft types and speeds are available. It is suitable for all kinds of models with continuous motion requirements, small size, or need for self-locking (using the worm gear N20 motor). For example, chassis drive motors for vehicle models, joint drive motors for robotic arms and rotary tables.

## Hardware Connection

Connect the terminal of the N20 reduction gear motor to one end of the 2pin SH1.0 wire, and the other end of the wire to the DC motor ports on both sides of the remote control receiver shield.

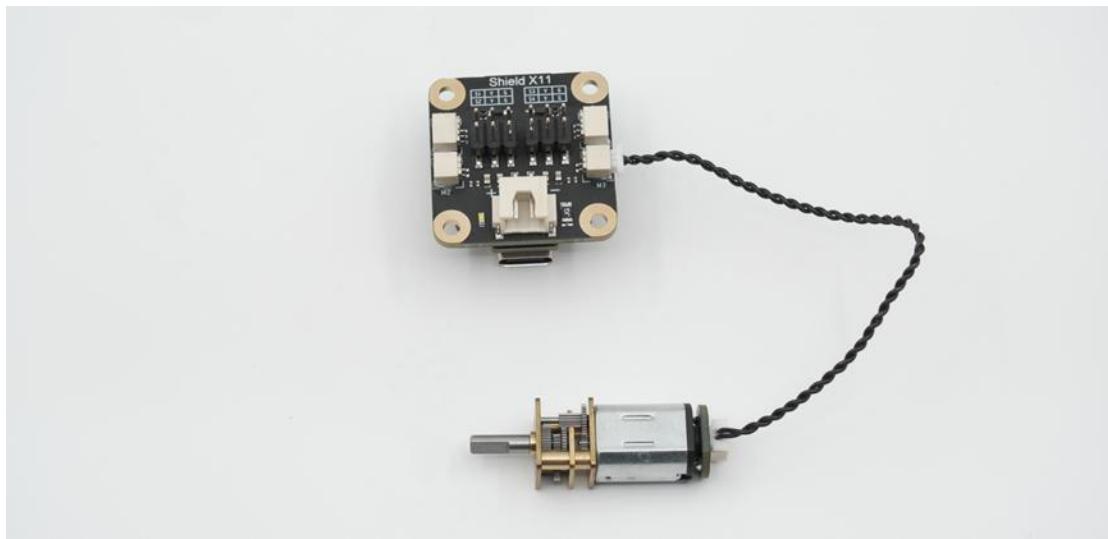

## Software Configuration

DC brushed motors have the same configuration method. Refer to the 030 Motor Software Configuration section above for details.

## 9g Servo Motor 360° -PG002




The 9g servo motor 360° is a motor with a velocity closed loop. .

Compared with other brushed motors, the 9g servo motor 360° has less torque, but can maintain a constant speed of rotation, and the movement is quieter, commonly used to drive the movement of some small and light decorative parts on the model.

## Hardware Connection


Plug the 9g servo motor 360° connector into the servo ports on the RC receiver

shield.

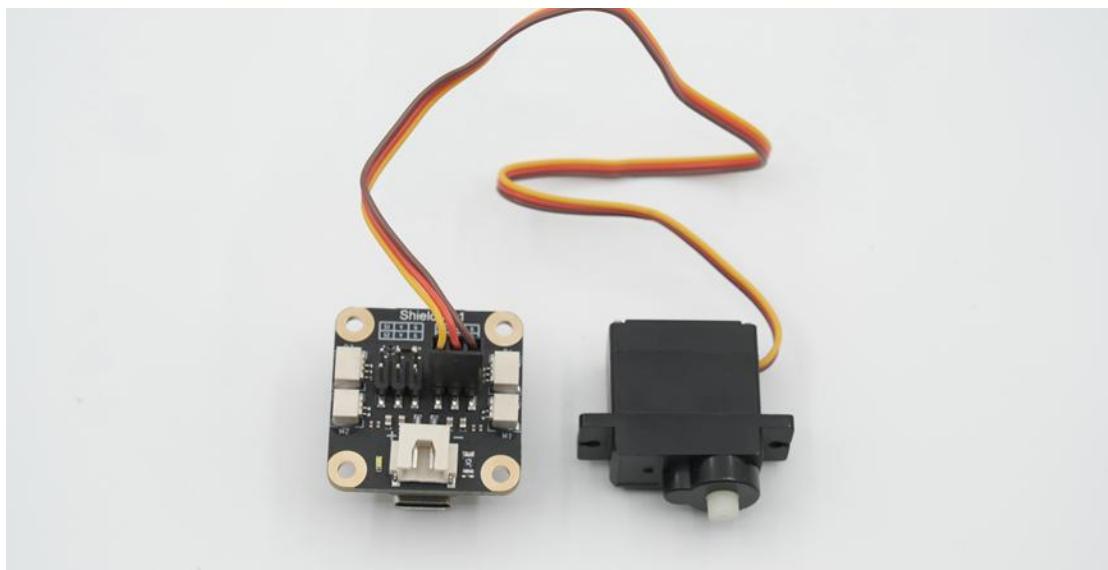

## Software Configuration

Click [+] of servo port and add a Speed Servo

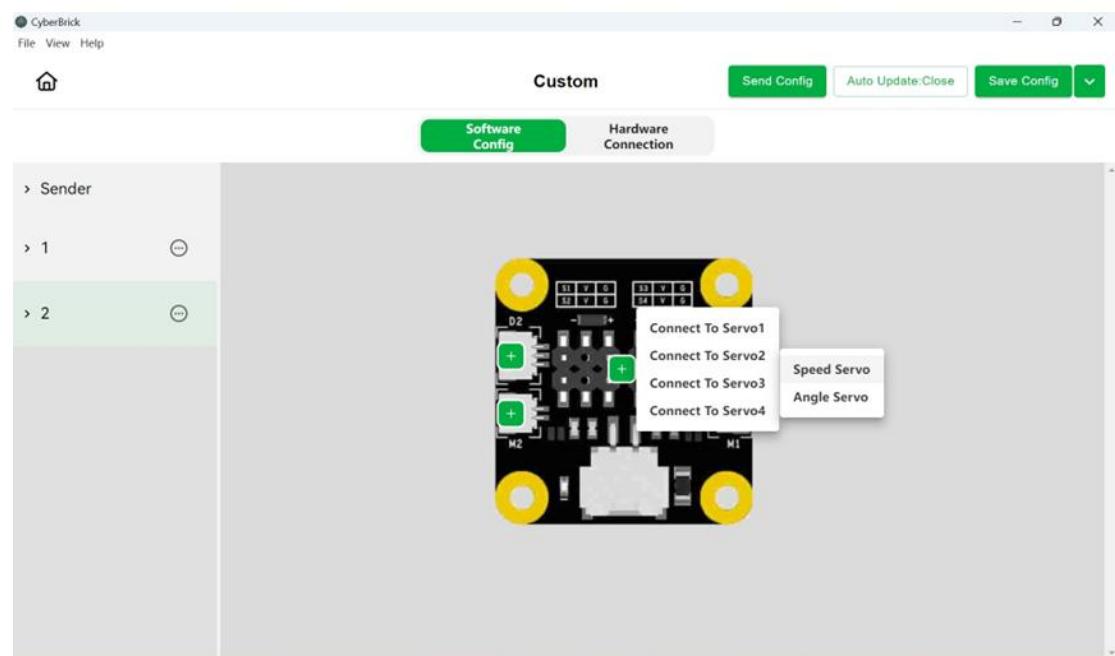

You can adjust the maximum speed of forward and reverse rotation of the speed servo in Modify interface

A screenshot of the CyberBrick software interface. The top menu bar includes 'File', 'View', 'Help', 'Custom' (selected), 'Send Config', 'Auto Update: Close', 'Save Config', and a dropdown arrow. The left sidebar has a tree view with nodes: 'Sender', '1', '2', 'LED', 'Speed Servo' (highlighted in green), 'Angle Servo', 'Motor', 'Buzzer', and 'Code'. The main content area is titled 'Custom' and shows a table for 'Servo 3'. The table has three columns: 'Device' (Servo 3), 'Positive Speed(0%~100%)' (60%), and 'Negative Speed(0%~100%)' (25%).

## 9g Servo Motor 180° -PG001




The 9g servo motor 180° is a motor with closed loop position.

The 9g servo motor 180° looks like a 9g servo motor 360° in appearance, but differs in that the 9g servo motor 180° will stabilise at a specified angle rather than speed. It makes the servo ideal for use as a steering mechanism, or as a deformation mechanism. For example, they are used to control steering racks in vehicle models and joint angles in robotic arm models.

## Hardware Connection


Plug the 9g servo motor 180° connector into the servo ports on the RC receiver

shield.

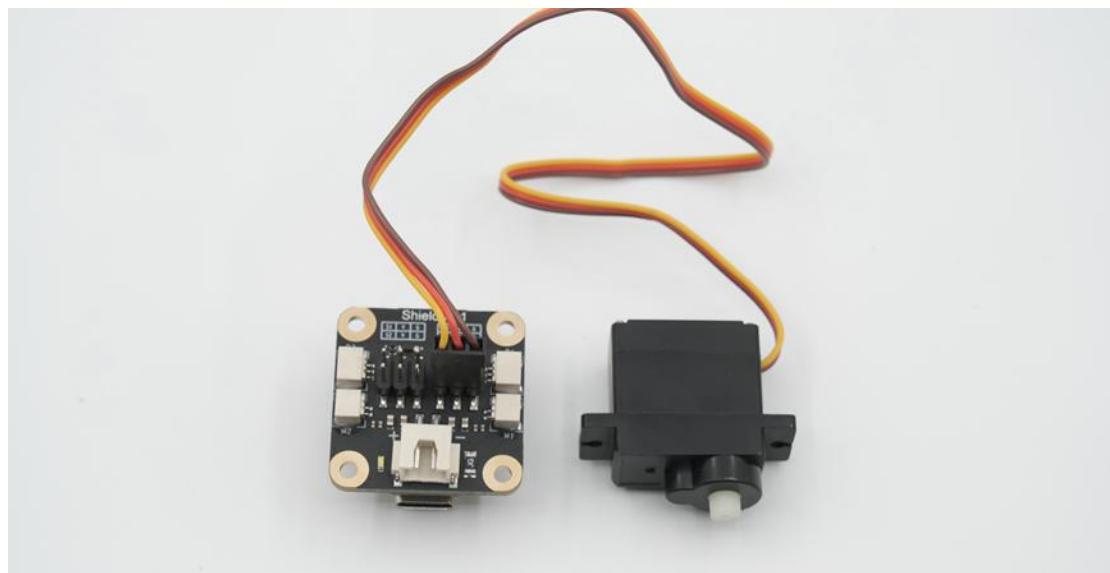


## Software Configuration

Click [+] of servo port and add a Angle Servo

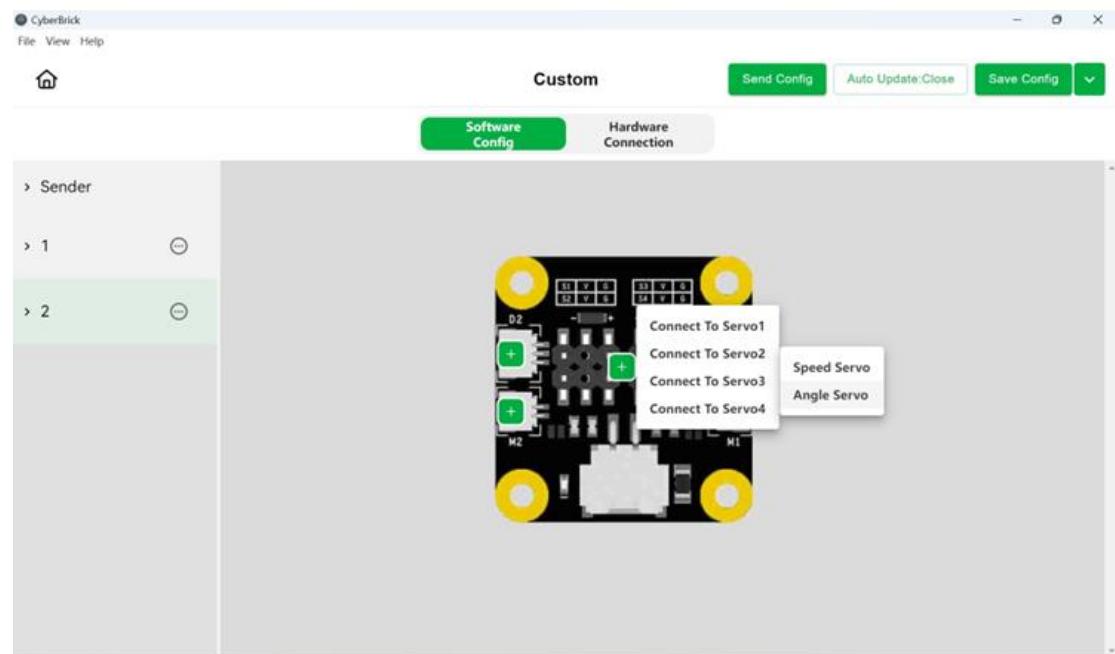

You can adjust the rotation speed and the maximum and minimum angle of the Angle Servo in the Modify interface

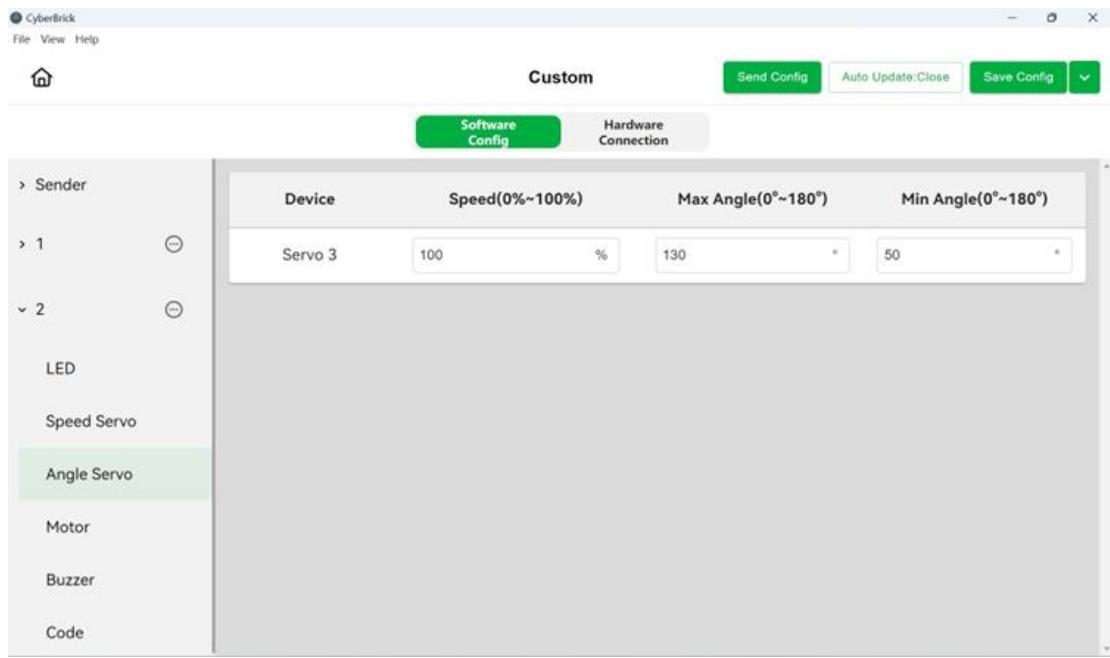

Hardware Kits Comparison	Ultimate Hardware Kit	Beginner Hardware Kit
Full electronic modules	<input checked="" type="checkbox"/> Build 2 remote & 2 vehicles	<input checked="" type="checkbox"/> Build 1 remote & 1 vehicle
Dual Vehicle Control Unlocked	<input checked="" type="checkbox"/> Ready to use after configuration	<input type="checkbox"/> Need 2 kits to unlock

\*Dual Vehicle Control: One remote commands both truck and forklift simultaneously



Item Number	Item Name	Qty of Ultimate Hardware Kit	Qty of Beginner Hardware Kit
1	<a href="#">Multi-Function Core Board</a>	4 pcs	2 pcs
2	<a href="#">Remote Control Receiver Shield</a>	2 pcs	1 pcs
3	<a href="#">Remote Control Transmitter Shield</a>	2 pcs	1 pcs
4	<a href="#">WS2812 LED Hub with 3Pin SH1.0 Connector</a>	2 pcs	1 pcs
5	<a href="#">Power Switch Module with 2Pin XH2.54 Connector</a>	2 pcs	1 pcs
6	<a href="#">Momentary Button Module with 2Pin SH1.0 Connector</a>	2 pcs	1 pcs
7	<a href="#">Single-Axis Joystick Module with 3Pin SH1.0 Connector</a>	2 pcs	1 pcs
8	<a href="#">Three-Position Rocker Switch Module with 3Pin SH1.0 Connector</a>	2 pcs	1 pcs
9	<a href="#">Dual-Axis Joystick Module with 3Pin SH1.0 Connectors</a>	4 pcs	2 pcs
10	<a href="#">3x1.5V AAA Battery Case with XH2.54 Connector</a>	2 pcs	1 pcs
11	<a href="#">14500 7.4V 800mAh Li-ion Battery</a>	2 pcs	1 pcs
12	<a href="#">7.4V Lithium Battery Charger with XH2.54 Connector</a>	1 pcs	1 pcs
13	<a href="#">100mm Wire with 2Pin XH2.54 Connectors</a>	2 pcs	1 pcs
14	<a href="#">100mm Wire with 3Pin SH1.0 Connectors</a>	14 pcs	7 pcs
15	<a href="#">100mm Wire with 2Pin SH1.0 Connectors</a>	2 pcs	1 pcs




16	<a href="#">WS2812 RGB LED with IDC0.8 4PIN</a>	6 pcs	4 pcs
17	<a href="#">Plastic Differential Gear Kit</a>	1pcs	1pcs
18	<a href="#">Ø33.7x13.85mm Rubber Tire</a>	4 pcs	4 pcs
19	<a href="#">030 Micro DC Motor with SH1.0</a>	4 pcs	2 pcs
20	<a href="#">1:48 Single-axis Plastic Reduction Gear Kit</a>	4 pcs	2 pcs
21	<a href="#">9g Positional Digital Servo-180°</a>	1pcs	1pcs
22	<a href="#">4x2mm Round Magnet</a>	20 pcs	20 pcs
23	<a href="#">0.5x5x20 mm Helical Compression Spring</a>	10 pcs	10 pcs
24	<a href="#">0.6x8x20 mm Helical Compression Spring</a>	5 pcs	5 pcs
25	<a href="#">0.6mm Black Nylon Cord 5m</a>	1pcs	1pcs
26	<a href="#">9g Continuous Rotation Digital Servo-360°</a>	2 pcs	1pcs
27	<a href="#">M2.5x6 BHCS Machine Screw</a>	100 pcs	100 pcs
28	<a href="#">Lubricant Grease</a>	2 pcs	1pcs


# 1. Accessories Specification

## 1.1. Multi-Function Controller Core-XA003

Integrated Bluetooth & WiFi, Support MicroPython Programming

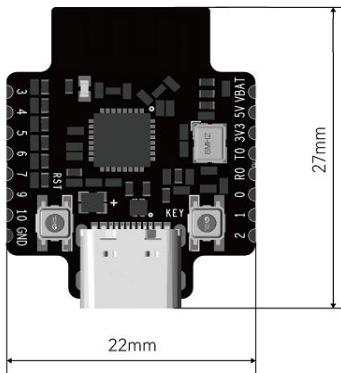


Parameter	Value
Type-C Input Voltage	DC 5V
VBAT Input Voltage	3.7V~12.6V
Antenna Type	PCB Antenna
Weight	6g

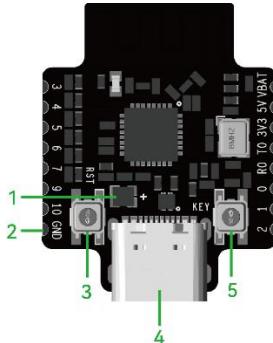


Item	Function
1	WS2812LED - RGB System Status Indicator
2	Stamp Cut - Solderable pinout
3	Reset Button - Reset Main Program
4	Type-C Port - Burning Firmware& Programming
5	User Button - Custom Function

## 1.2. Remote Control Receiver Shield -XA004

2CH DC Motor Driver, 4CH PWM Driver, 2CH ws2812 LED output.

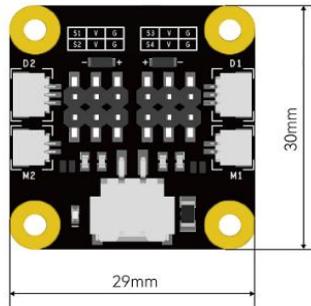


Parameter	Value
Input Voltage	DC 7.4V – 12.6V
Current	Standby current 60mA, Working current 200~300mA, Maximum current 3A
Output	4CH PWM, 2CH MOTOR, 2CH LED
Weight	6g

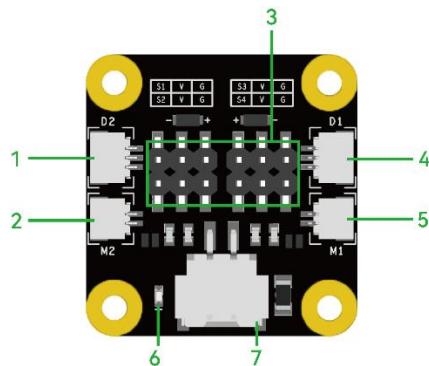


Port	Function
1	WS2812 Port 1 - SH1.0 3P LED port for WS2812LED strip
2	DC Motor Port 1 - SH1.0 2P DC motor port. Output voltage equal to power input voltage. Maximum current 1A.
3	Servo Port -PWM output for servos. 5V Output, Left/Right side PWM&LED maximum current is 2A. Total PWM&LED maximum current is 3A.
4	WS2812 Port 2 - SH1.0 3P LED port for WS2812LED strip
5	DC Motor Port 2 - SH1.0 2P DC motor port. Output voltage equal to power input voltage. Maximum current 1A.
6	Power Indicator - White light means power on.
7	Power Input - XH2.54 2P DC power input.

### 1.3. Remote Control Transmitter Shield -XA005

6CH ADC Input, 4CH Digital input

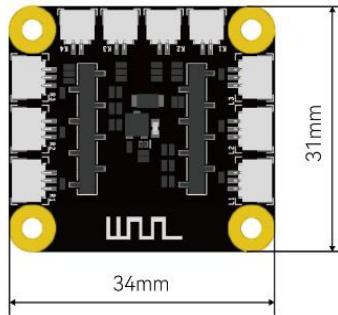


Parameter	Value
Input Voltage	DC 4.5 – 12.6V
Working Current	65mA
Input Channel	6CH ADC, 4CH digital
Weight	5.5g

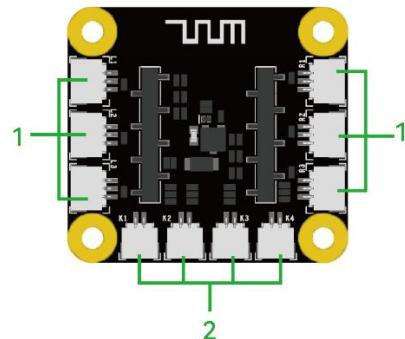

Port	Function
1	ADC input port – Connecting ADC modules such as joystick
2	Digital input port - Connecting binary-input modules such as momentary button

## 1.4. WS2812 LED Hub-XA006


Connect up to four WS2812 RGB LED

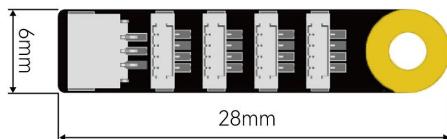

port	Function
1	Input port – 3P SH1.0, 5V
2	Output port – IDC 0.8 4P

## 1.5. Power Switch Module-XA007


Battery On/Off Switch

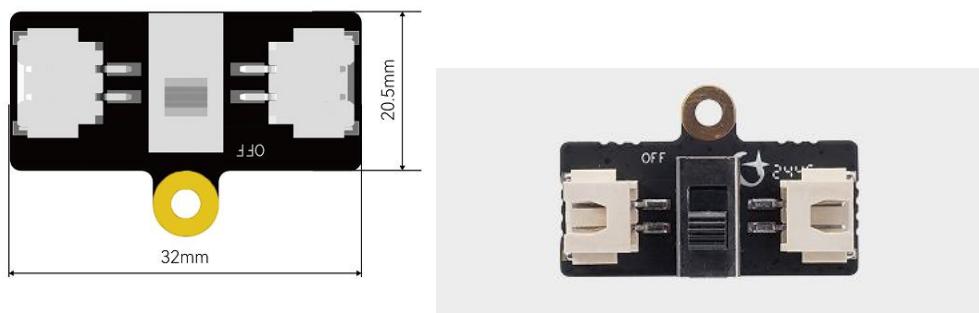

Parameter	Value
Input Voltage	Maximum 12.6V
Permissible Current	3A
Weight	4.1g
Connector	XH2.54 2P


## 1.6. Momentary Button Module-XA008

Binary Input Module

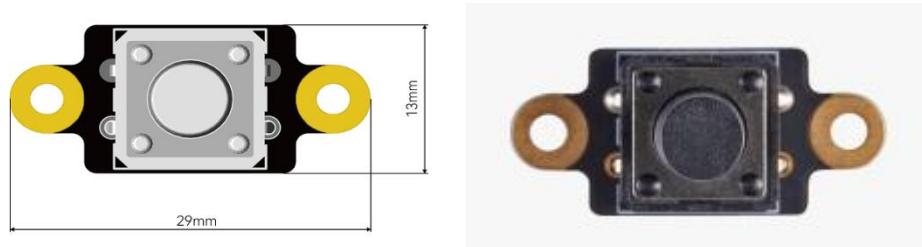


## 1.7. Single-Axis Joystick Module- XA009

Single Channel ADC Input Module

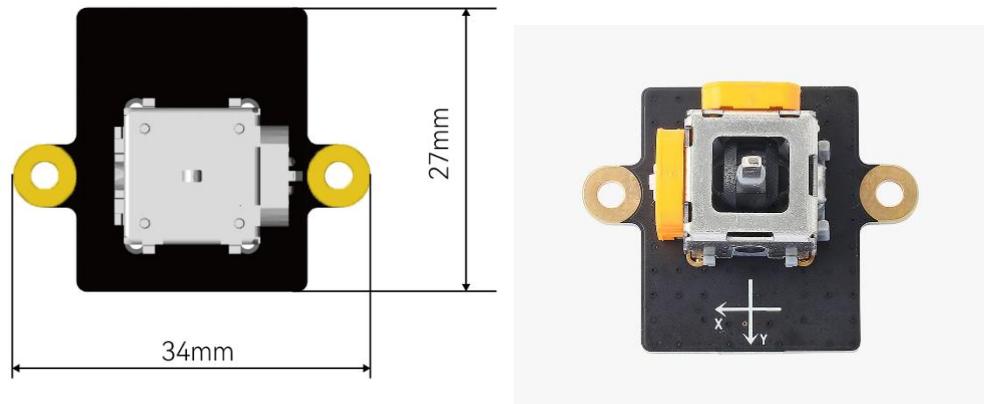

Parameter	Value
Input Voltage	3.3V
Output Signal Type	ADC
Output Channel	1CH
Sensor Type	Potentiometer
Electrical resistance	10kΩ
Weight	6.15g
Connector	3-pin SH1.0


## 1.8. Three-Position Rocker Switch Module-XA010

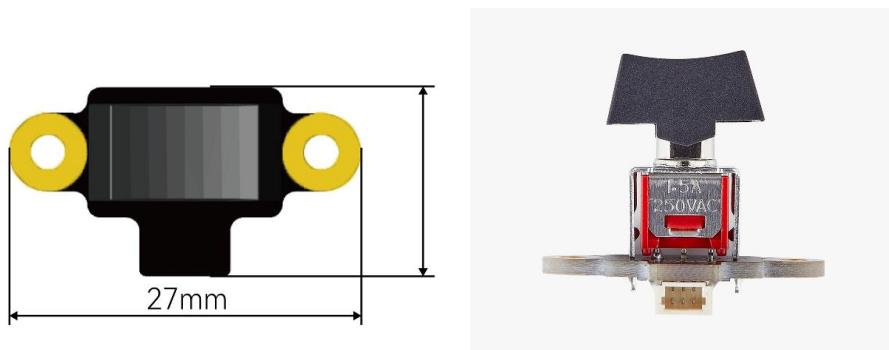

Parameter	Value
Input Voltage	3.3V
Output Signal Type	ADC
Position	3
Weight	2.73g
Connector	3-pin SH1.0

## 1.9. Dual-Axis Joystick Module - XA011

2CH ADC Output

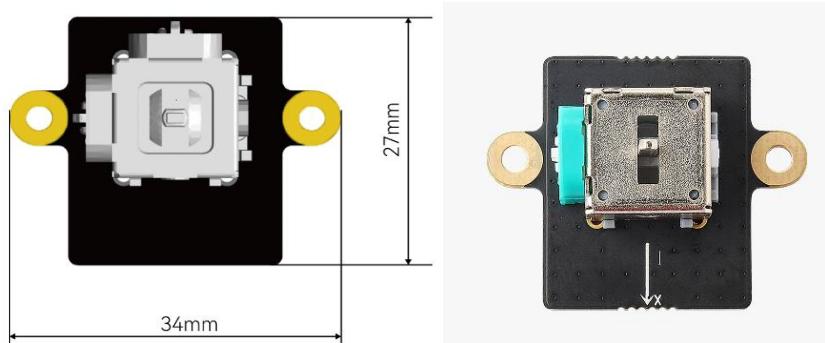

Parameter	Value
Output Signal Type	ADC
Output Channel	2CH
Sensor Type	Potentiometer
Electrical resistance	10kΩ
Connector	3-pin SH1.0 * 2
Weight	6.6g

## 1.10. WS2812 RGB LED - KB003



Parameter	Value
Input Voltage	3.5~5.3V
Connector	IDC 0.8mm 4P

## 1.11. Li-on Battery

2S 700mAh Li-on Battery with XH2.54 2P Connector

